


**MAGNETICS**

**708-003031027060**

MAGNETICS OPAL EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, satined white, satined PMMA opal diffuser beam 110°, light output direct, without converter, dimmability: not dimmable, IP20




**DRAWING**

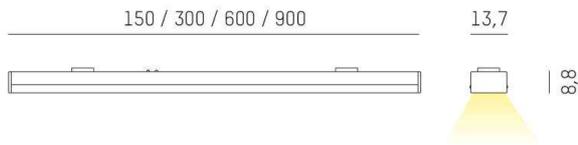

**TECHNICAL DETAILS**

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	270
Colour temp. [K]	3500K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	without converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	110°
Voltage [V]	24 VDC
Material	PMMA
Length [mm]	300
Width [mm]	13,7
Height [mm]	8,8
IP protection class	IP20
Voltage class	protection cl. III
Shock resistance	IK03
Net weight [kg]	0,36
Colour lamp	satined white
EAN-Number	9010506292329
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F

**LIGHT DISTRIBUTION CURVE**

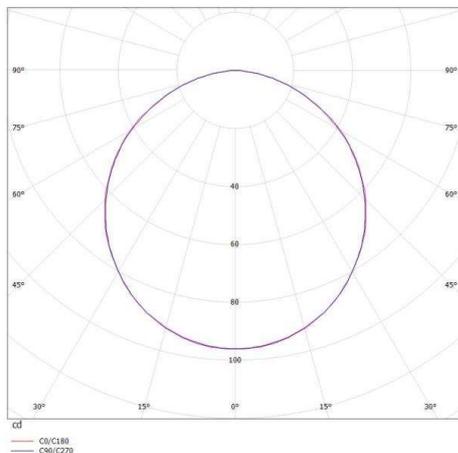

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.