


MAGNETICS

708-003061027060

MAGNETICS OPAL EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, satined white, satined PMMA opal diffuser beam 110°, light output direct, without converter, dimmability: not dimmable, IP20




DRAWING

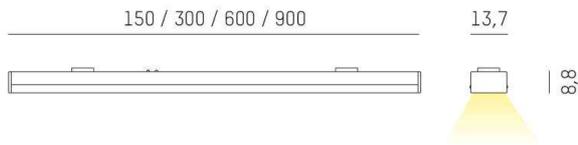

TECHNICAL DETAILS

| | |
|-----------------------|--------------------|
| System perform. [W] | 6 |
| Bulb type | LED |
| Luminous flux [lm] | 405 |
| Colour temp. [K] | 3500K |
| CRI | >90 |
| Optics | PMMA opal diffuser |
| Designer | INHOUSE |
| Converter | without converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 110° |
| Voltage [V] | 24 VDC |
| Material | PMMA |
| Length [mm] | 449,6 |
| Width [mm] | 13,7 |
| Height [mm] | 8,8 |
| IP protection class | IP20 |
| Voltage class | protection cl. III |
| Shock resistance | IK03 |
| Net weight [kg] | 0,56 |
| Colour lamp | satined white |
| EAN-Number | 9010506724653 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | F |

LIGHT DISTRIBUTION CURVE

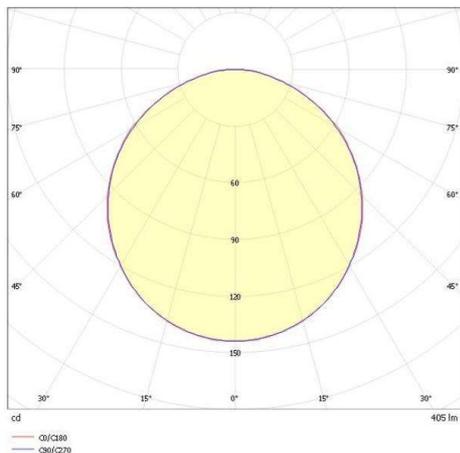

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.