



**MAGNETICS H**

**708-010201029060**

MAGNETICS H PDI SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser beam 100°, light output direct / indirect, with converter, max. 700mA, dimmability: not dimmable, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 2000mm, IP20 directly/ indirectly illuminated

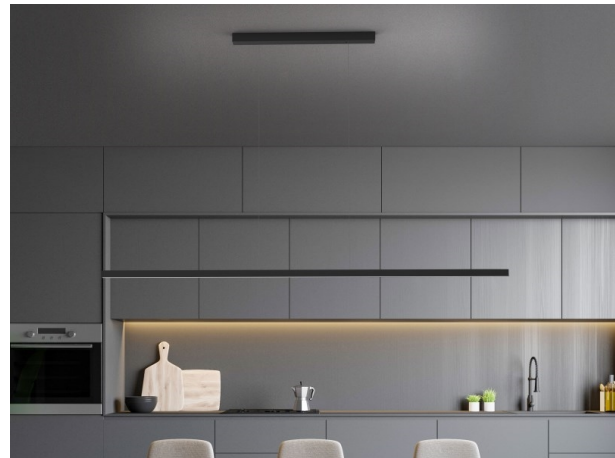

**DRAWING**

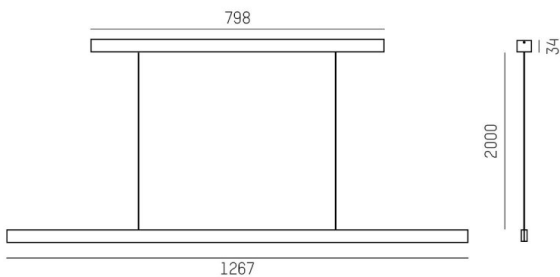


**TECHNICAL DETAILS**

|                     |                    |
|---------------------|--------------------|
| System perform. [W] | 30                 |
| Bulb type           | LED                |
| Luminous flux [lm]  | 2300               |
| Current sec. [mA]   | 700                |
| Colour temp. [K]    | 3000K              |
| CRI                 | >90                |
| Optics              | PMMA opal diffuser |
| Designer            | INHOUSE            |
| Converter           | with converter     |
| Dimming             | not dimmable       |
| Light output        | direct / indirect  |
| Beam angle [°]      | 100°               |
| Voltage [V]         | 220-240V 50/60Hz   |
| Material            | die-cast aluminium |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 1267             |
| Width [mm]          | 16,6             |
| Height [mm]         | 35               |
| Pendant length [mm] | 2000             |
| IP protection class | IP20             |
| Voltage class       | protection cl. I |
| Shock resistance    | IK03             |
| Net weight [kg]     | 3,30             |

**LIGHT DISTRIBUTION CURVE**

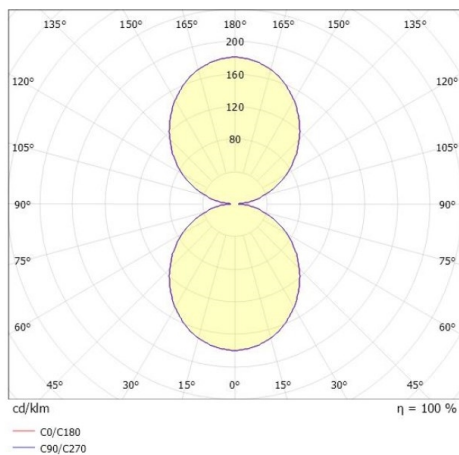

|                             |   |
|-----------------------------|---|
| Colour lamp                 | black                                   |
| RAL                         | 9005                                    |
| Colour adapter/ceiling base | black                                   |
| Electric wire               | Tension control in the suspension ropes |
| EAN-Number                  | 9010870159112                           |
| Lifetime [h]                | L80 B10 50 000                          |
| Energy efficiency cl.       | E                                       |
| No. of luminaires B16A      | 36                                      |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.