



MAGNETICS H

708-01021102306d

MAGNETICS H PDI SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser beam 100°, light output direct / indirect, with converter, max. 700mA, dimmability: DALI, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 2000mm, IP20 directly/ indirectly illuminated

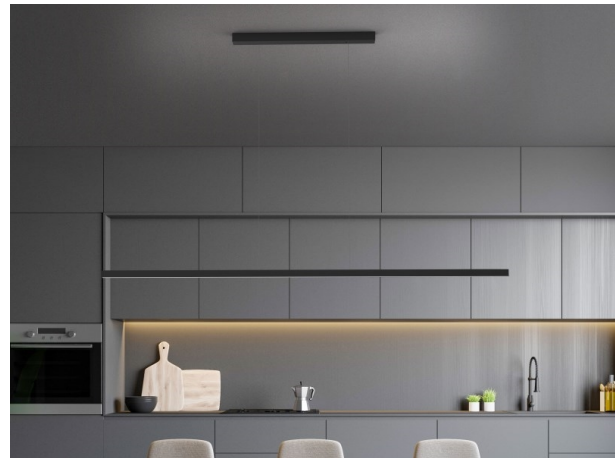

DRAWING

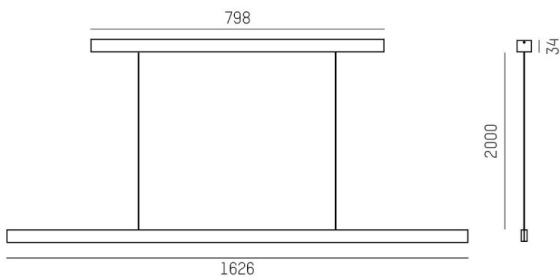


TECHNICAL DETAILS

| | |
|---------------------|--------------------|
| System perform. [W] | 38 |
| Bulb type | LED |
| Luminous flux [lm] | 2930 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Optics | PMMA opal diffuser |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct / indirect |
| Beam angle [°] | 100° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | die-cast aluminium |

| | |
|---------------------|------------------|
| Length [mm] | 1626 |
| Width [mm] | 16,6 |
| Height [mm] | 35 |
| Pendant length [mm] | 2000 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK03 |
| Net weight [kg] | 3,61 |

LIGHT DISTRIBUTION CURVE

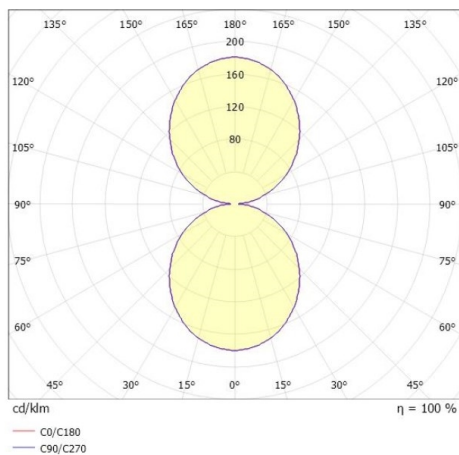

| | |
|-----------------------------|---|
| Colour lamp | black |
| RAL | 9005 |
| Colour adapter/ceiling base | black |
| Electric wire | Tension control in the suspension ropes |
| EAN-Number | 9010506884869 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |
| No. of luminaires B16A | 36 |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.