


**MAGNETICS DALI**

**708-10202034906d**

MAGNETICS SPOT M TRACK SPOTLIGHT WITH 24V ADAPTER made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited synthetic reflector beam 38°, light output direct, swiveling 350°, tilting 90°, without converter, max. 265mA, dimmability: DALI, adapter/ceiling base black, IP20




**DRAWING**

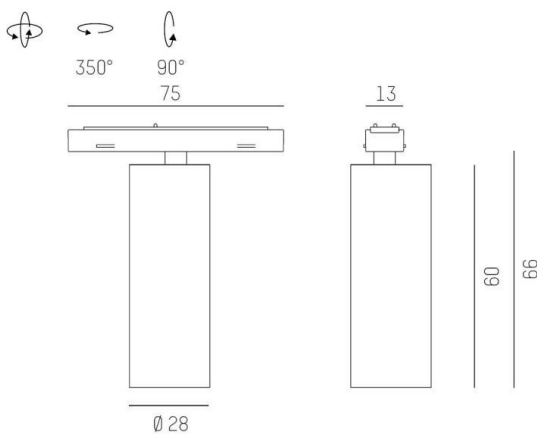

**TECHNICAL DETAILS**

|                             |                                      |
|-----------------------------|--------------------------------------|
| System perform. [W]         | 7                                    |
| Bulb type                   | LED                                  |
| Luminous flux [lm]          | 390                                  |
| Current sec. [mA]           | 265                                  |
| Colour temp. [K]            | 3000K                                |
| CRI                         | PREMIUM>90                           |
| Optics                      | vacuum deposited synthetic reflector |
| Designer                    | INHOUSE                              |
| Converter                   | without converter                    |
| Light output                | direct                               |
| Beam angle [°]              | 38°                                  |
| Voltage [V]                 | 24 VDC                               |
| Material                    | aluminium                            |
| Length [mm]                 | 75                                   |
| Width [mm]                  | 28                                   |
| Height [mm]                 | 66                                   |
| Diameter [mm]               | 28                                   |
| IP protection class         | IP20                                 |
| Voltage class               | protection cl. III                   |
| Shock resistance            | IK03                                 |
| Net weight [kg]             | 0,35                                 |
| Colour lamp                 | black                                |
| RAL                         | 9005                                 |
| Colour adapter/ceiling base | black                                |
| EAN-Number                  | 9010506957655                        |
| Lifetime [h]                | 50 000 L80 B10                       |
| Energy efficiency cl.       | E                                    |

**LIGHT DISTRIBUTION CURVE**

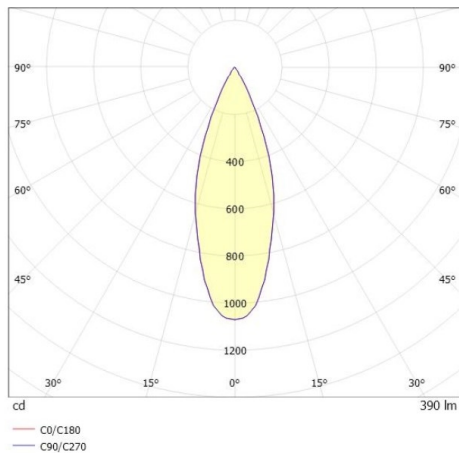

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.