


MAGNETICS DALI

708-10202084906d

MAGNETICS SPOT M TRACK SPOTLIGHT WITH 24V ADAPTER made of aluminium, black, similar to RAL 9005, vacuum deposited synthetic Dark-reflector beam 24°, light output direct, swiveling 350°, tilting 90°, without converter, max. 265mA, dimmability: DALI, adapter/ceiling base black, IP20




DRAWING

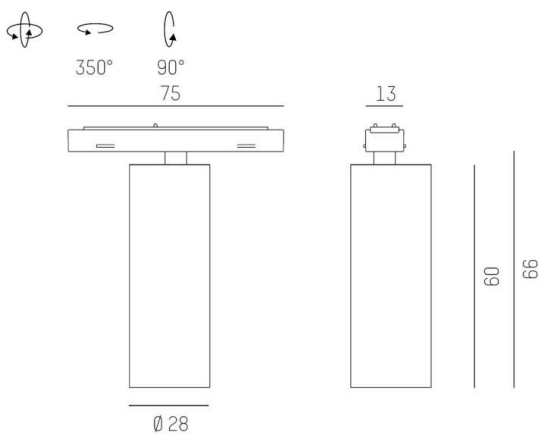

TECHNICAL DETAILS

| | |
|-----------------------------|---|
| System perform. [W] | 7 |
| Bulb type | LED |
| Luminous flux [lm] | 210 |
| Current sec. [mA] | 265 |
| Colour temp. [K] | 3000K |
| CRI | PREMIUM>90 |
| Optics | vacuum deposited synthetic Dark-reflector |
| Designer | INHOUSE |
| Converter | without converter |
| Light output | direct |
| Beam angle [°] | 24° |
| Voltage [V] | 24 VDC |
| Material | aluminium |
| Length [mm] | 75 |
| Width [mm] | 28 |
| Height [mm] | 66 |
| Diameter [mm] | 28 |
| IP protection class | IP20 |
| Voltage class | protection cl. III |
| Shock resistance | IK03 |
| Net weight [kg] | 0,35 |
| Colour lamp | black |
| RAL | 9005 |
| Colour adapter/ceiling base | black |
| EAN-Number | 9010506957693 |
| Lifetime [h] | 50 000 L80 B10 |
| Energy efficiency cl. | E |

LIGHT DISTRIBUTION CURVE

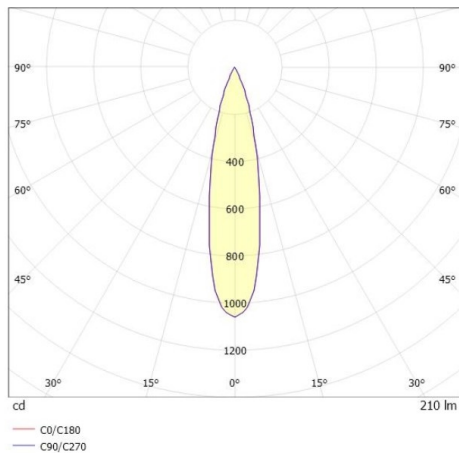

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.