


INTERO 600 ECO

712-011701121905d

INTERO 600 ECO RECESSED CEILING LUMINAIRE made of steel sheet, white, similar to RAL 9016, beam 80°, light output direct, with converter, max. 300-700mA, dimmability: DALI 2, cable black, IP20 with bulb and folding springs




DRAWING

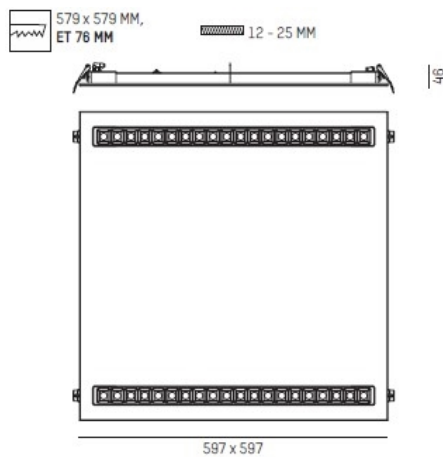

TECHNICAL DETAILS

System perform. [W]	16-36
Bulb type	LOP26 L60
No. of bulb holders	2x
Socket	GR6d-15
Luminous flux [lm]	2166-4846
Current sec. [mA]	300-700
Colour temp. [K]	3000K
CRI	>80
Converter	with converter
Light output	direct
Beam angle [°]	80°
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	597
Width [mm]	597
Height [mm]	46
Ceiling cutout [mm]	579x579
Ceiling thickness [mm]	12,5-45
Recess depth [mm]	76
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK05
Net weight [kg]	4,13
Colour lamp	white
RAL	9016
Electric wire	black
EAN-Number	9010506680393
Lifetime [h]	L80 B10 50 000

LIGHT DISTRIBUTION CURVE

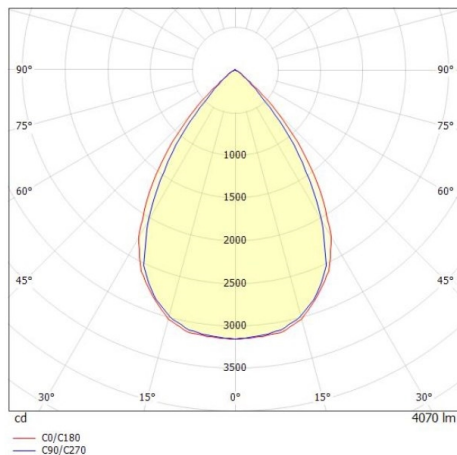

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.