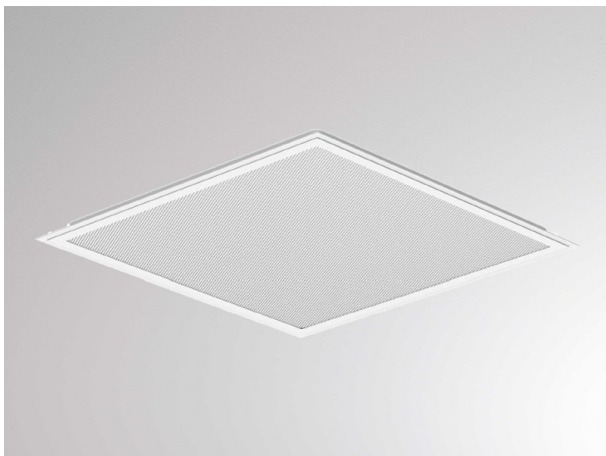


PANA**712-013100501405d**

PANA 625 R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, with converter, max. 300-1050mA, dimmability: DALI 2, cable white, IP20

**DRAWING****TECHNICAL DETAILS**

| | |
|------------------------|----------------------|
| System perform. [W] | 12-38 |
| Bulb type | LED |
| Current sec. [mA] | 300-1050 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| UGR | <19 |
| Optics | microprismatic cover |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | 90° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 620 |
| Width [mm] | 620 |
| Height [mm] | 30 |
| Ceiling cutout [mm] | 605x605 |
| Ceiling thickness [mm] | 5-30 |
| Recess depth [mm] | 155 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK02 |
| Net weight [kg] | 2,32 |
| Colour lamp | white |
| RAL | 9016 |
| Electric wire | white |
| EAN-Number | 9010506758849 |
| Lifetime [h] | L80 B10 50 000 |
| No. of luminaires B16A | 50 |

LIGHT DISTRIBUTION CURVE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.