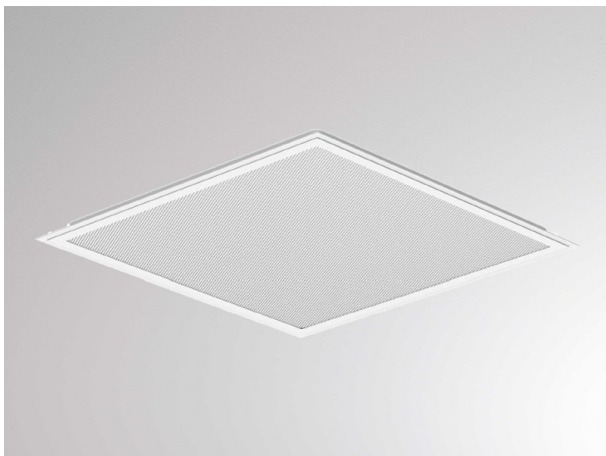


PANA**712-013100501905d**

PANA 625 R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, with converter, max. 300-1050mA, dimmability: DALI 2, cable white, IP20

**DRAWING****TECHNICAL DETAILS**

System perform. [W]	12-38
Bulb type	LED
Current sec. [mA]	300-1050
Colour temp. [K]	3000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Light output	direct
Beam angle [°]	90°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	620
Width [mm]	620
Height [mm]	30
Ceiling cutout [mm]	605x605
Ceiling thickness [mm]	5-30
Recess depth [mm]	155
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK04
Net weight [kg]	2,32
Colour lamp	white
RAL	9016
Electric wire	white
EAN-Number	9010506758887
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.