MOLTO LUCE®

LOG 50 SYSTEM

715-070412041900d

LOG 50 OFFICE EINSATZ LIGHT INSERT made of metal,Lens optics with vacuum deposited synthetic reflector beam 66°, light output direct, UGR <16, with converter, max. 430mA, dimmability: DALI, through wiring 3x1,5mm² + 2x0,75mm², IP20

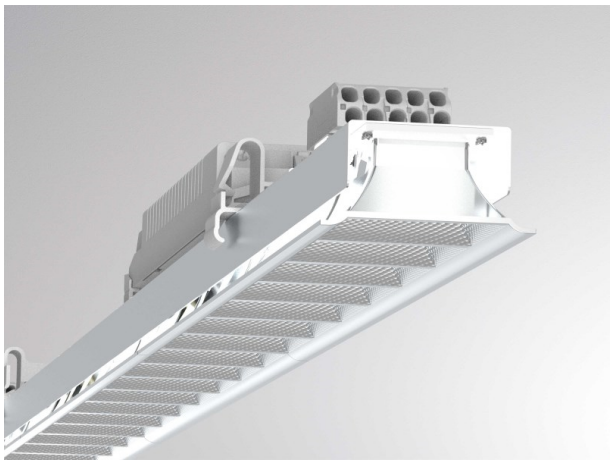

DRAWING

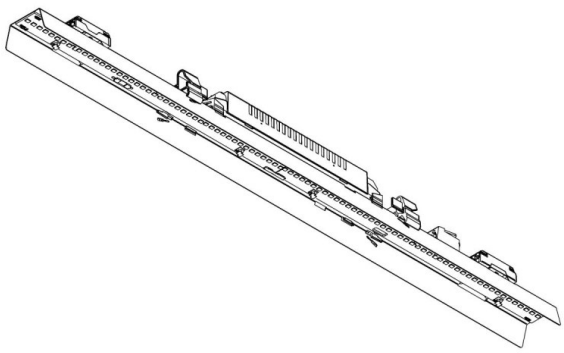

TECHNICAL DETAILS

System perform. [W]	20
Bulb type	LED
Luminous flux [lm]	2800
Current sec. [mA]	430
Colour temp. [K]	3000K
CRI	>80
UGR	<16
Optics	Lens optics with vacuum deposited synthetic reflector
Designer	INHOUSE
Converter	with converter
Light output	direct
Beam angle [°]	66°
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm² + 2x0,75mm²
Material	metal
Length [mm]	1122
Width [mm]	49
Height [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,94
EAN-Number	9010506395181
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

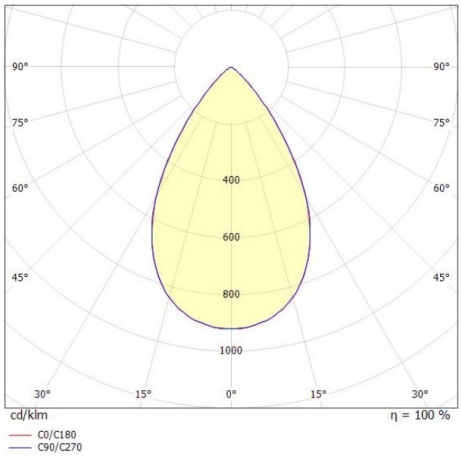

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.