LOG 50

715-0707124524050

LOG 50 SPOT EINSATZ LIGHT INSERT made of metal, white, similar to RAL 9016,vacuum deposited synthetic Dark-reflector beam 24°, light output direct, with converter, max. 550mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

DRAWING

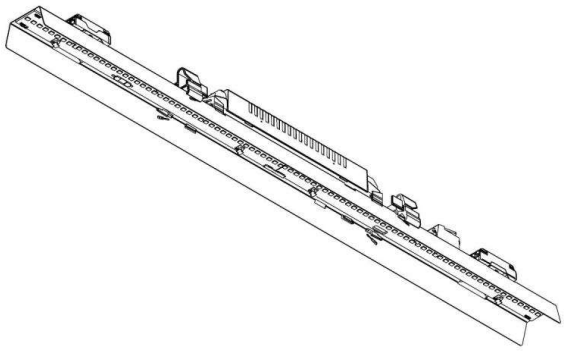

LIGHT DISTRIBUTION CURVE

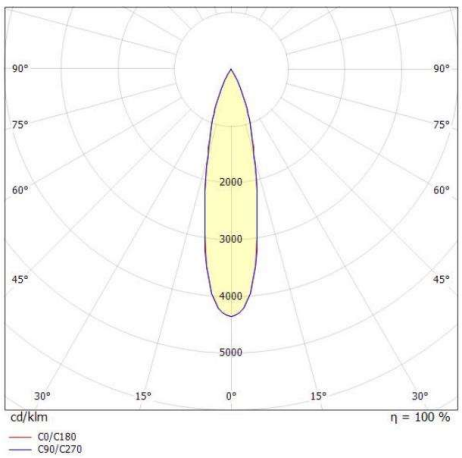

TECHNICAL DETAILS

System perform. [W]	23
Bulb type	LED
Luminous flux [lm]	1250
Current sec. [mA]	550
Colour temp. [K]	4000K
CRI	>90
Optics	vacuum deposited synthetic Dark-reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	24°
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm²
Material	metal
Length [mm]	1123
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,10
Colour lamp	white
RAL	9016
EAN-Number	9010506378238
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	50

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.