


VALO

720-008321029550

VALO TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9016, PMMA cover light output direct / indirect, swiveling 355°, with converter, max. 700mA, dimmability: not dimmable, adapter/ceiling base white, IP20




DRAWING

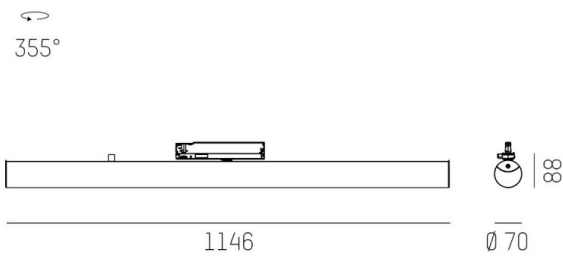

TECHNICAL DETAILS

| | |
|-----------------------------|-------------------|
| System perform. [W] | 26 |
| Bulb type | LED |
| Luminous flux [lm] | 3000 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | PMMA diffuser |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 1146 |
| Diameter [mm] | 70 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK02 |
| Net weight [kg] | 1,68 |
| Colour lamp | white |
| RAL | 9016 |
| Colour adapter/ceiling base | white |
| EAN-Number | 9010506841725 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |
| No. of luminaires B16A | 35 |

LIGHT DISTRIBUTION CURVE

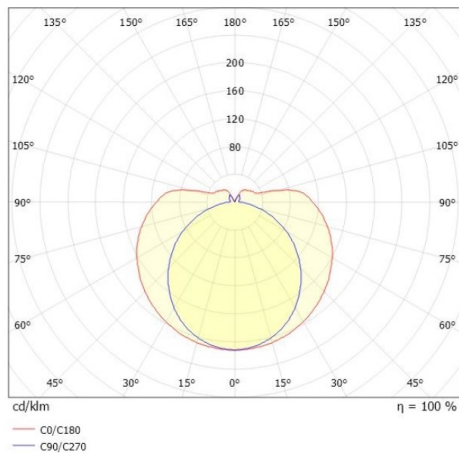

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.