


CONCEPT

723-10112011455m

CONCEPT RIGHT F FLOOR LAMP made of aluminium, white, similar to RAL 9016, microfaceted free-form reflector beam for single workplace, light output direct / indirect 30:70, UGR <19, with converter, max. 1500mA, dimmability: motion swarm, with motion detector, day light control and swarm function, cable black, IP20 out of the box mode - with activated daylight control and motion detection




DRAWING

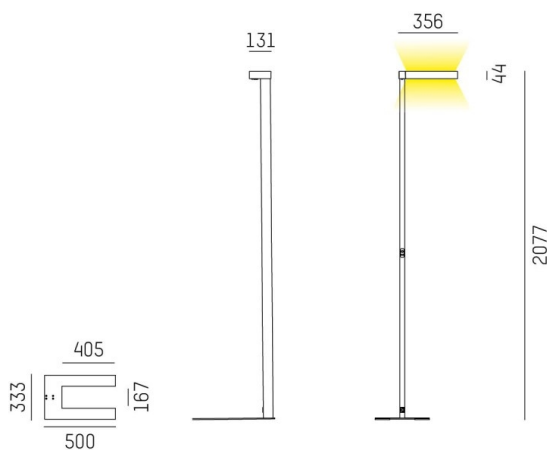

TECHNICAL DETAILS

System perform. [W]	70
Bulb type	LED
Luminous flux [lm]	7710
Current sec. [mA]	1500
Colour temp. [K]	4000K
CRI	>80
UGR	<19
Optics	microfaceted free-form reflector
Designer	INHOUSE
Converter	with converter
Dimming	motion swarm
Motion detector	with motion detector, day light control and swarm function
Light output	direct / indirect 30:70
Beam angle [°]	für Einzelarbeitsplatz
Voltage [V]	220-240V AC/DC
Material	aluminium
Length [mm]	355
Width [mm]	131
Height [mm]	2077
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	12,44
Colour lamp	white
RAL	9016
Electric wire	black
EAN-Number	9010506849394
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	18

LIGHT DISTRIBUTION CURVE

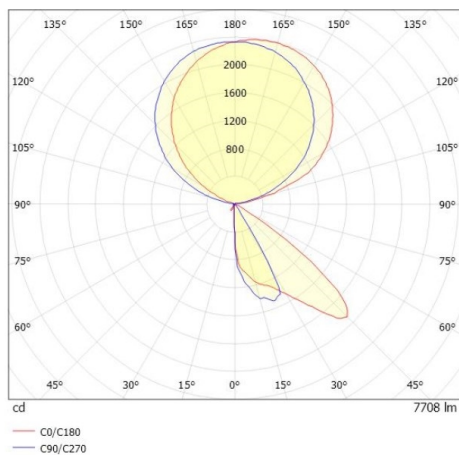

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.