



LOG OUT 2.1 IP54

728-10405111980d


LOG OUT 2.1 IP54 SD WALL / CEILING LUMINAIRE made of die-cast aluminium, natural anodised, satined PMMA opal diffuser light output direct, with converter, dimmability: DALI, through wiring 3x1,5mm² + 2x0,75mm², IP54

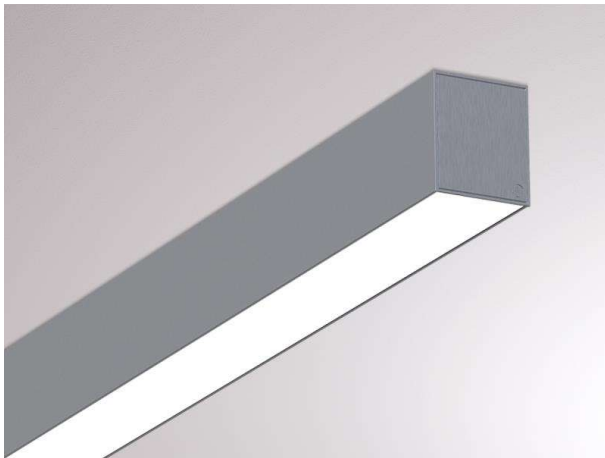

DRAWING

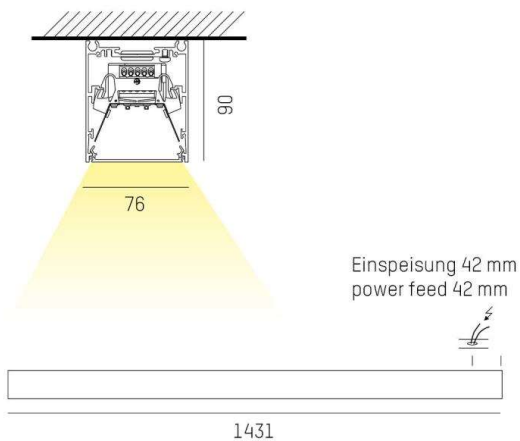

LIGHT DISTRIBUTION CURVE

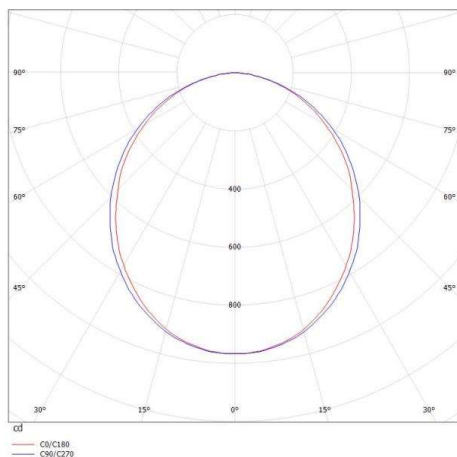

TECHNICAL DETAILS

| | |
|------------------------|--|
| System perform. [W] | 20 |
| Bulb type | LED |
| Luminous flux [lm] | 2550 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Optics | PMMA opal diffuser |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Through wiring | 3x1,5mm ² + 2x0,75mm ² |
| Material | die-cast aluminium |
| Length [mm] | 1431 |
| Width [mm] | 76 |
| Height [mm] | 90 |
| IP protection class | IP54 |
| Voltage class | protection cl. I |
| Net weight [kg] | 5,64 |
| Colour lamp | natural anodised |
| EAN-Number | 9010506191370 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 50 |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.