MOLTO LUCE®

LOG OUT 2.1

728-10706361356d

LOG OUT 2.1 BINA LENS SD SURFACE MOUNTED CEILING LUMINAIRE made of die-cast aluminium, white, similar to RAL 9016, decor black,lens optic with anti-glare grid beam 65°, light output direct, UGR <19, with converter, dimmability: DALI, through wiring 3x1,5mm² + 2x0,75mm², IP20

DRAWING

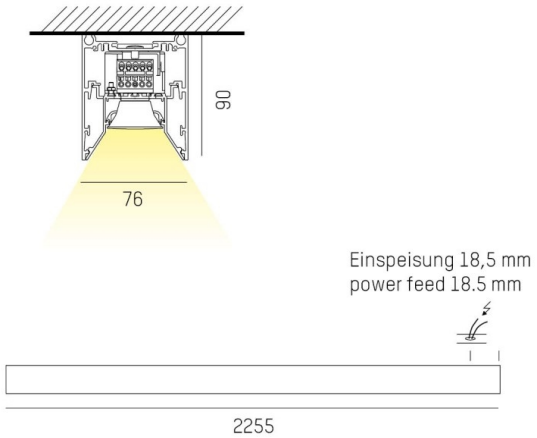

LIGHT DISTRIBUTION CURVE

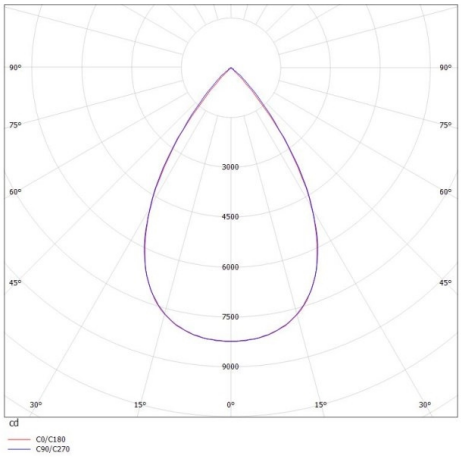

TECHNICAL DETAILS

System perform. [W]	86
Bulb type	LED
Luminous flux [lm]	8740
Colour temp. [K]	2700K
CRI	>80
UGR	<19
Optics	lens optics with glare control louvre
Designer	INHOUSE
Converter	with converter
Light output	direct
Beam angle [°]	65°
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm² + 2x0,75mm²
Material	die-cast aluminium
Length [mm]	2254,5
Width [mm]	76
Height [mm]	90
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	8,42
Colour lamp	white
RAL	9016
Colour decor	black
EAN-Number	9010506216622
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	25

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.