


## LOG 2.1. SYSTEM

728-60204211405d

LOG 2.1 SYSTEM EINSATZ BINA OPAL D/ID LIGHT INSERT made of aluminium, white, similar to RAL 9016, satined PMMA opal diffuser light output direct / indirect, with converter, max. 900mA, dimmability: DALI, through wiring 3x1,5mm<sup>2</sup> + 2x0,75mm<sup>2</sup>, IP20



## DRAWING

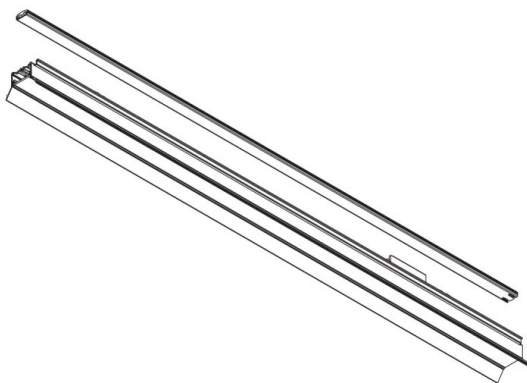

## LIGHT DISTRIBUTION CURVE

## TECHNICAL DETAILS

|                        |  |
|------------------------|--|
| System perform. [W]    | 31   |
| Bulb type              | LED  |
| Luminous flux [lm]     | 4460   |
| Current sec. [mA]      | 900  |
| Colour temp. [K]       | 4000K  |
| CRI                    | >80  |
| Optics                 | PMMA opal diffuser                           |
| Designer               | INHOUSE                                      |
| Converter              | with converter                               |
| Light output           | direct / indirect                            |
| Voltage [V]            | 220-240V 50/60Hz                             |
| Through wiring         | 3x1,5mm <sup>2</sup> + 2x0,75mm <sup>2</sup> |
| Material               | aluminium                                    |
| Length [mm]            | 1124   |
| IP protection class    | IP20   |
| Voltage class          | protection cl. I                             |
| Shock resistance       | IK06   |
| Net weight [kg]        | 2,84   |
| Colour lamp            | white  |
| RAL                    | 9016   |
| EAN-Number             | 9010506161489                                |
| Lifetime [h]           | L80 B10 50 000                               |
| Energy efficiency cl.  | D  |
| No. of luminaires B16A | 50   |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.