MOLTO LUCE®

## LOG 2.1. SYSTEM

## 728-602051114050

LOG 2.1 SYSTEM EINSATZ BINA OPAL LIGHT INSERT made of aluminium, white, similar to RAL 9016,satined PMMA opal diffuser light output direct, with converter, max. 450mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

### DRAWING

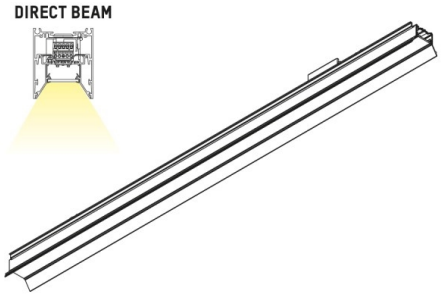


### LIGHT DISTRIBUTION CURVE

### TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 20 |
| Bulb type | LED |
| Luminous flux [lm] | 2670 |
| Current sec. [mA] | 450 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| Optics | PMMA opal diffuser |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Through wiring | 3x1,5mm² |
| Material | aluminium |
| | |
| Length [mm] | 1405 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK06 |
| Net weight [kg] | 2,66 |
| | |
| Colour lamp | white |
| RAL | 9016 |
| EAN-Number | 9010506090482 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 50 |

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.