


**FIT LONG**

**757-1250np30fitwok**

FIT LONG RECESSED CEILING LUMINAIRE made of aluminium, white, microprismatic PMMA cover for perfect anti-glare light output direct, UGR <19, without converter, max. 900/1200mA, IP40




**DRAWING**

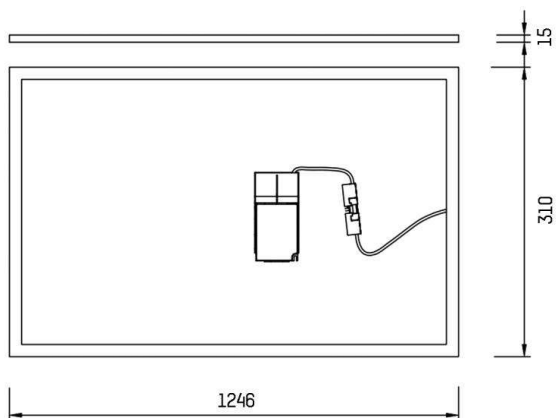

**TECHNICAL DETAILS**

|                       |                      |
|-----------------------|----------------------|
| Bulb type             | LED 35W/57W          |
| Luminous flux [lm]    | 4200/6000            |
| Current sec. [mA]     | 900/1200             |
| Colour temp. [K]      | 3000K                |
| CRI                   | >80                  |
| UGR                   | <19                  |
| Optics                | microprismatic cover |
| Converter             | without converter    |
| Light output          | direct               |
| Material              | aluminium            |
| Length [mm]           | 1246                 |
| Width [mm]            | 310                  |
| Height [mm]           | 15                   |
| Recess depth [mm]     | 55                   |
| IP protection class   | IP40                 |
| Voltage class         | protection cl. II    |
| Net weight [kg]       | 2,95                 |
| Colour lamp           | white                |
| EAN-Number            | 8596099044435        |
| Lifetime [h]          | 80 000               |
| Energy efficiency cl. | D                    |

**LIGHT DISTRIBUTION CURVE**

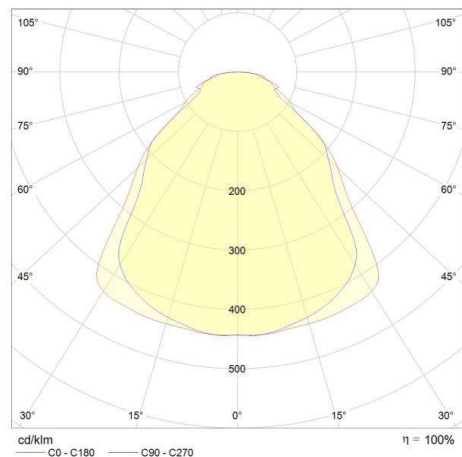

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.