


**FIT LONG**

**757-1250pm40fitwok**

FIT LONG RECESSED CEILING LUMINAIRE made of aluminium, white, satined PMMA opal diffuser light output direct, without converter, max. 900/1200mA, IP40




**DRAWING**

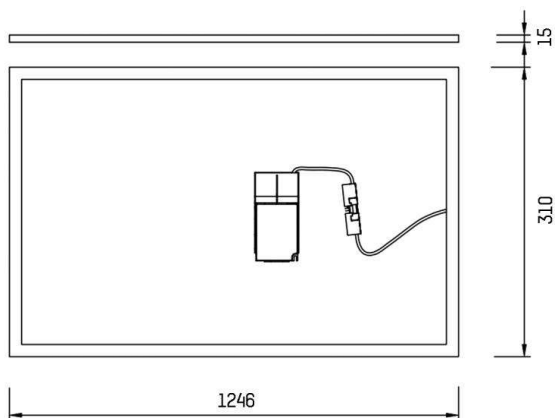

**TECHNICAL DETAILS**

Bulb type	LED 35W/57W
Luminous flux [lm]	4100/5800
Current sec. [mA]	900/1200
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	without converter
Light output	direct
Material	aluminium
Length [mm]	1246
Width [mm]	310
Height [mm]	15
Recess depth [mm]	55
IP protection class	IP40
Voltage class	protection cl. II
Net weight [kg]	2,95
Colour lamp	white
EAN-Number	8596099044404
Lifetime [h]	80 000
Energy efficiency cl.	D

**LIGHT DISTRIBUTION CURVE**

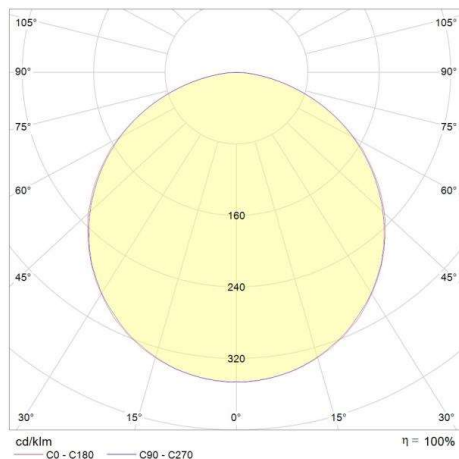

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.