


**KX**

**757-2105**

KX WALL / CEILING LUMINAIRE made of aluminium, white, sated PMMA opal diffuser light output direct, with converter, dimmable not dimmable, IP54



**DRAWING**

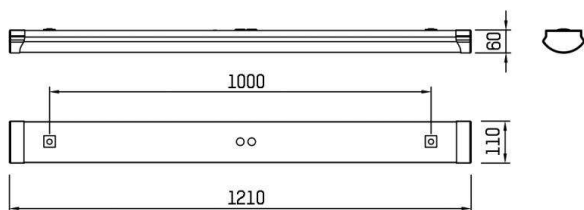


**TECHNICAL DETAILS**

|                     |                    |
|---------------------|--------------------|
| System perform. [W] | 18                 |
| Bulb type           | LED                |
| Luminous flux [lm]  | 2600               |
| Colour temp. [K]    | 4000K              |
| CRI                 | >80                |
| Optics              | PMMA opal diffuser |
| Converter           | with converter     |
| Dimming             | nicht dimmbar      |
| Light output        | direct             |
| Voltage [V]         | 220-240V 50/60Hz   |
| Material            | aluminium          |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 1210             |
| Width [mm]          | 110              |
| Height [mm]         | 60               |
| IP protection class | IP54             |
| Voltage class       | protection cl. I |
| Net weight [kg]     | 1,80             |

**LIGHT DISTRIBUTION CURVE**

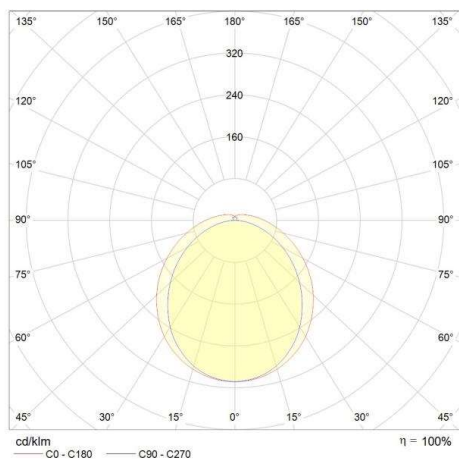

|              |               |
|--------------|---------------|
| Color lamp   | white         |
| EAN-Number   | 8596099024864 |
| Lifetime [h] | 80 000        |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.