


KX

757-2107

KX WALL / CEILING LUMINAIRE made of steel, white, satined PMMA opal diffuser beam symmetric, light output direct, with converter, dimmability: not dimmable, IP54 with bulb




DRAWING

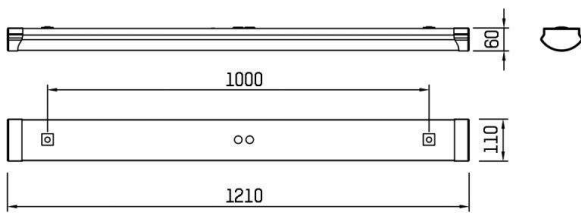

TECHNICAL DETAILS

System perform. [W]	36
Bulb type	LED
Luminous flux [lm]	5400
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	symmetrisch
Voltage [V]	220-240V 50/60Hz
Material	steel
Length [mm]	1210
Width [mm]	110
Height [mm]	60
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	1,60
Colour lamp	white
EAN-Number	8596099025304
Lifetime [h]	50 000
Energy efficiency cl.	C

LIGHT DISTRIBUTION CURVE

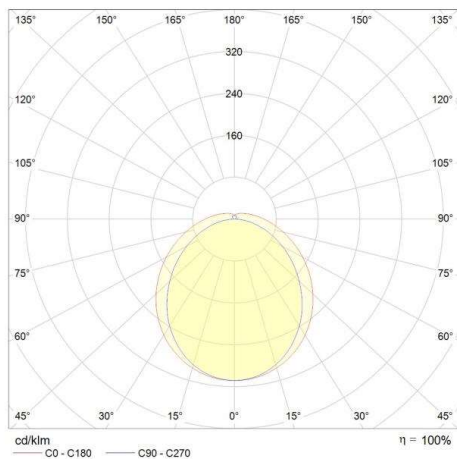

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.