


**KX**

**757-2108**

KX WALL / CEILING LUMINAIRE made of steel, white, satined PMMA opal diffuser light output direct, with converter, max. 1400mA, dimmability: not dimmable, IP54




**DRAWING**

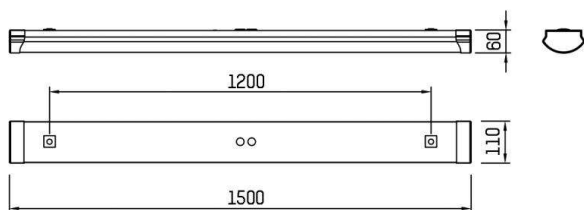

**TECHNICAL DETAILS**

System perform. [W]	47
Bulb type	LED
Luminous flux [lm]	6900
Current sec. [mA]	1400
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel
Length [mm]	1500
Width [mm]	110
Height [mm]	60
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	2,40
Colour lamp	white
EAN-Number	8596099029524
Lifetime [h]	80 000
Energy efficiency cl.	C

**LIGHT DISTRIBUTION CURVE**

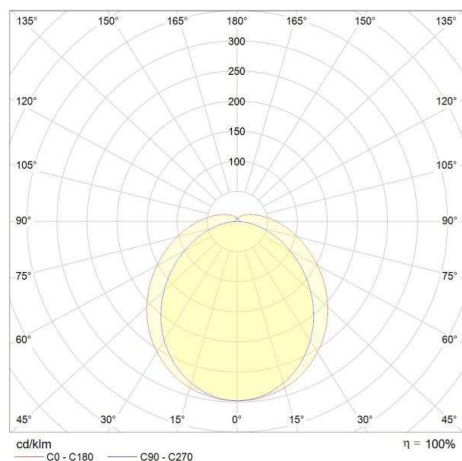

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.