


SOL

757-2113

SOL WALL / CEILING LUMINAIRE made of aluminium, natural anodised, satined PMMA opal diffuser light output direct, with converter, dimmability: not dimmable, IP20 incl. on-off switch




DRAWING

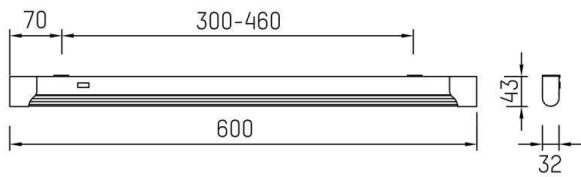

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	1250
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	600
Width [mm]	32
Height [mm]	43
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,50
Colour lamp	natural anodised
EAN-Number	8596099024314
Lifetime [h]	30 000
Energy efficiency cl.	C

LIGHT DISTRIBUTION CURVE

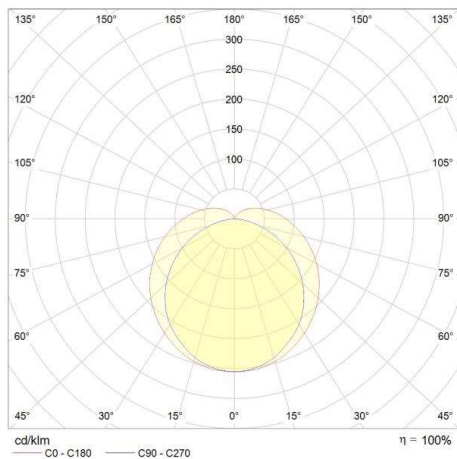

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.