


TEL X

757-2119

TEL X SURFACE MOUNTED CEILING LUMINAIRE made of steel sheet, white, satined PMMA opal diffuser light output direct, with converter, dimmability: not dimmable, IP20




DRAWING

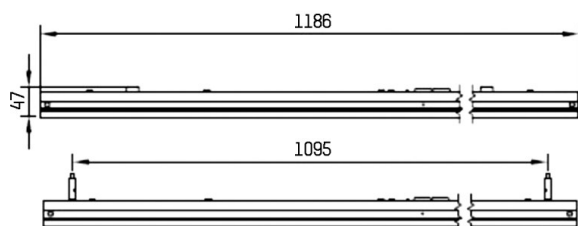

TECHNICAL DETAILS

System perform. [W]	27
Bulb type	LED
Luminous flux [lm]	4100
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	1186
Width [mm]	38
Height [mm]	47
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,00
Colour lamp	white
EAN-Number	8596099045265
Lifetime [h]	80 000
Energy efficiency cl.	C
No. of luminaires B16A	51

LIGHT DISTRIBUTION CURVE

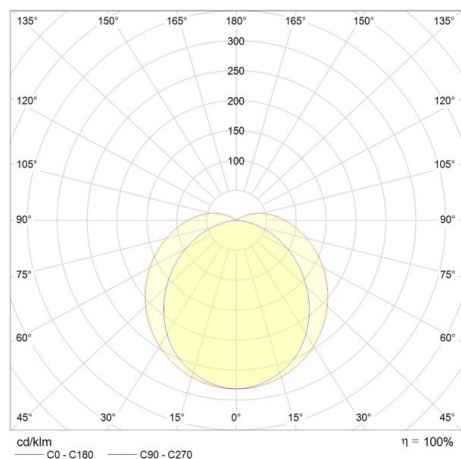

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.