


US

757-625np40uswok

US RECESSED CEILING LUMINAIRE made of aluminium, white, microprismatic PMMA cover for perfect anti-glare light output direct, UGR <19, without converter, dimmable not dimmable, IP40



DRAWING

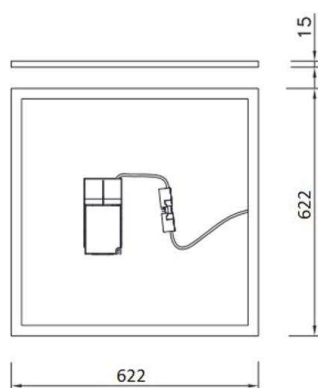


TECHNICAL DETAILS

Bulb type	LED 28W/38W
Luminous flux [lm]	3000/3850
Colour temp. [K]	4000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	without converter
Dimming	nicht dimmbar
Light output	direct
Material	aluminium

Length [mm]	622
Width [mm]	622
Height [mm]	15
IP protection class	IP40
Voltage class	protection cl. II
Net weight [kg]	4,50

LIGHT DISTRIBUTION CURVE

Color lamp	white
EAN-Number	8596099003197
Lifetime [h]	30 000

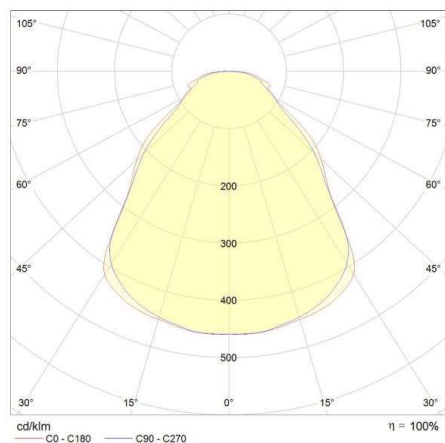

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.