


**BRSB**

**757-I2006**

BRSB SURFACE MOUNTED CEILING LUMINAIRE made of steel sheet, white, satined PMMA opal diffuser light output direct, with converter, dimmability: not dimmable, IP44




**DRAWING**

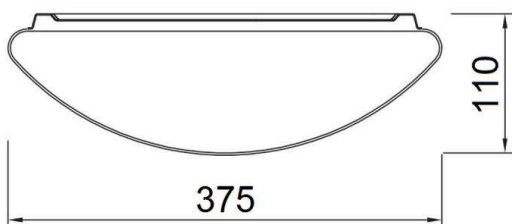

**TECHNICAL DETAILS**

System perform. [W]	28
Bulb type	LED
Luminous flux [lm]	2500
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Height [mm]	110
Diameter [mm]	375
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	1,40
Colour lamp	white
EAN-Number	8595073795141
Lifetime [h]	80 000
Energy efficiency cl.	D

**LIGHT DISTRIBUTION CURVE**

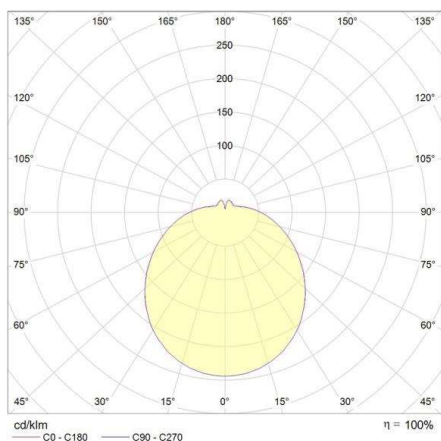

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.