


## BRSB

757-I2008

BRSB SURFACE MOUNTED CEILING LUMINAIRE made of steel sheet, white, satined PMMA opal diffuser light output direct, with converter, dimmability: not dimmable, IP44




## DRAWING

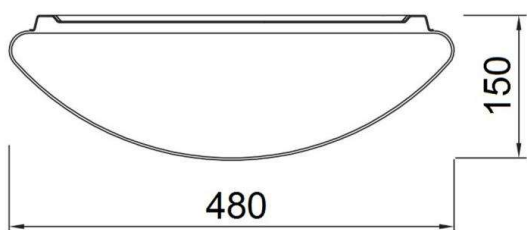

## TECHNICAL DETAILS

System perform. [W]	37
Bulb type	LED
Luminous flux [lm]	3500
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Height [mm]	150
Diameter [mm]	480
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	1,85
Colour lamp	white
EAN-Number	8595073795158
Lifetime [h]	80 000
Energy efficiency cl.	D

## LIGHT DISTRIBUTION CURVE

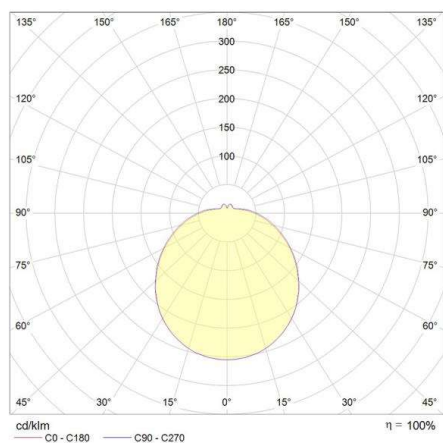

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.