


**IBP**

**757-I6006dali**

IBP RECESSED CEILING LUMINAIRE made of steel sheet, white, satined PMMA opal diffuser light output direct, with converter, dimmability: DALI, IP54




**DRAWING**

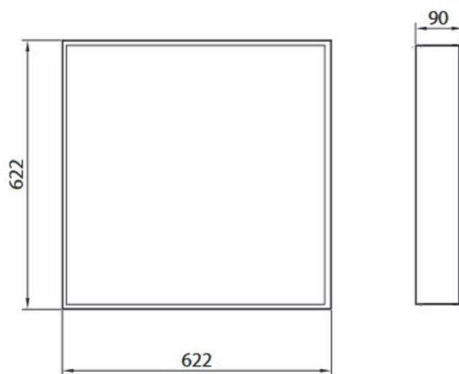

**TECHNICAL DETAILS**

System perform. [W]	32
Bulb type	LED
Luminous flux [lm]	4100
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	622
Width [mm]	622
Height [mm]	90
Recess depth [mm]	200
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	2,60
Colour lamp	white
EAN-Number	8596099035433
Lifetime [h]	50 000
Energy efficiency cl.	D

**LIGHT DISTRIBUTION CURVE**

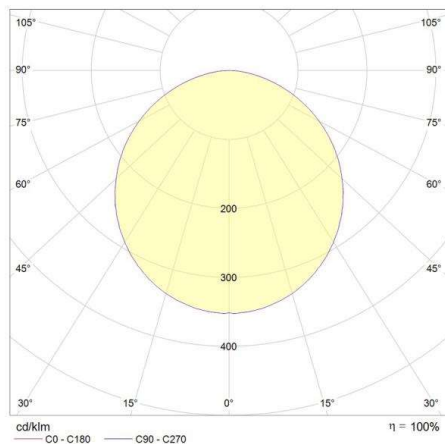

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.