


TILIA

789-56850

TILIA 1A WALL / CEILING LUMINAIRE made of steel sheet, white, polycarbonate cover satined white, light output direct, with converter, dimmability: not dimmable, IP54




DRAWING

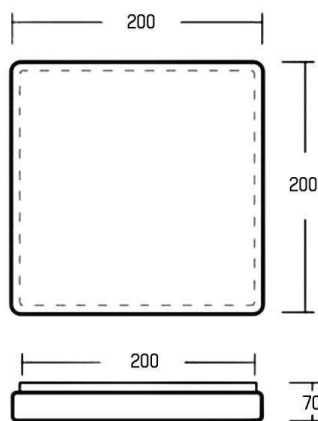

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	1040
Colour temp. [K]	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	220
Width [mm]	220
Height [mm]	55
IP protection class	IP54
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	0,80
Color lamp	white
Glass color	satined white
EAN-Number	8591728568504
Lifetime [h]	50 000

LIGHT DISTRIBUTION CURVE

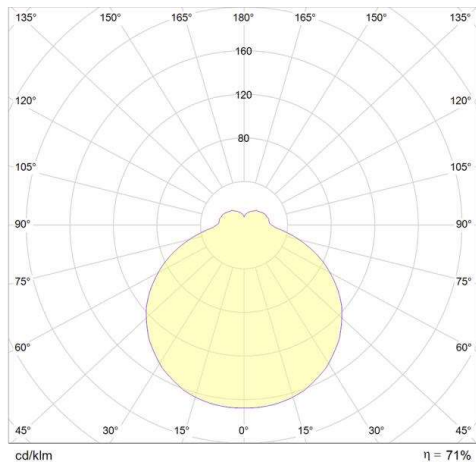

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.