


MATAR

789-71036

MATAR 1 WALL / CEILING LUMINAIRE made of aluminium, black, satined PMMA opal diffuser satined white, with converter, dimmability: not dimmable, IP44




DRAWING

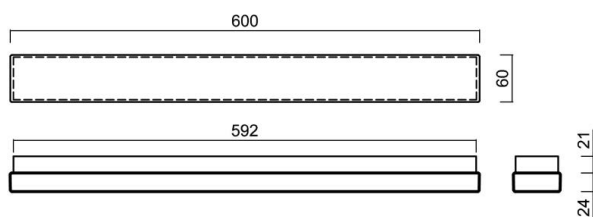

TECHNICAL DETAILS

| | |
|-----------------------|--------------------|
| System perform. [W] | 13 |
| Bulb type | LED |
| Luminous flux [lm] | 1400 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Optics | PMMA opal diffuser |
| Converter | with converter |
| Dimming | not dimmable |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 600 |
| Width [mm] | 60 |
| Height [mm] | 46 |
| IP protection class | IP44 |
| Voltage class | protection cl. I |
| Shock resistance | IK10 |
| Net weight [kg] | 0,71 |
| Colour lamp | black |
| Colour of glass/shade | satined white |
| EAN-Number | 8591728710361 |
| Energy efficiency cl. | C |

LIGHT DISTRIBUTION CURVE

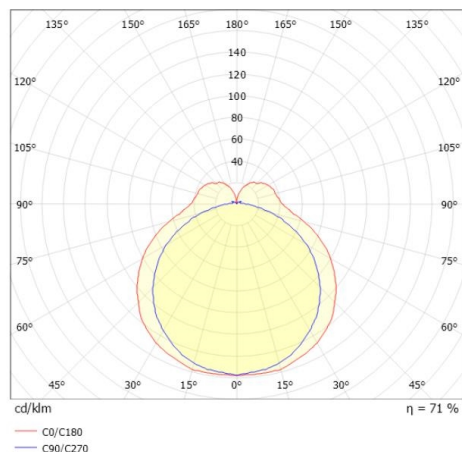

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.