



PETIT

851-s1801w24

MINIPETIT SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, transparent glass light output direct, without converter, dimmability: see converter, IP65

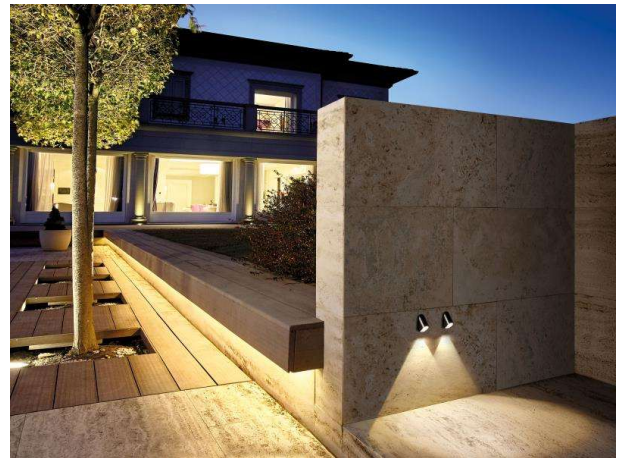


DRAWING

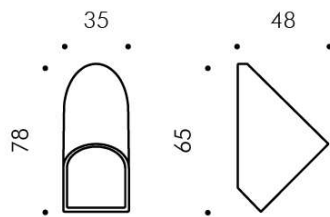

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	68
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	without converter
Dimming	see converter
Light output	direct
Material	aluminium
Length [mm]	78
Width [mm]	35
Height [mm]	48
IP protection class	IP65
Voltage class	protection cl. III
Shock resistance	IK07
Net weight [kg]	0,24
Colour lamp	anthrazite
EAN-Number	8033357241064
Lifetime [h]	50 000 L70 B20
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

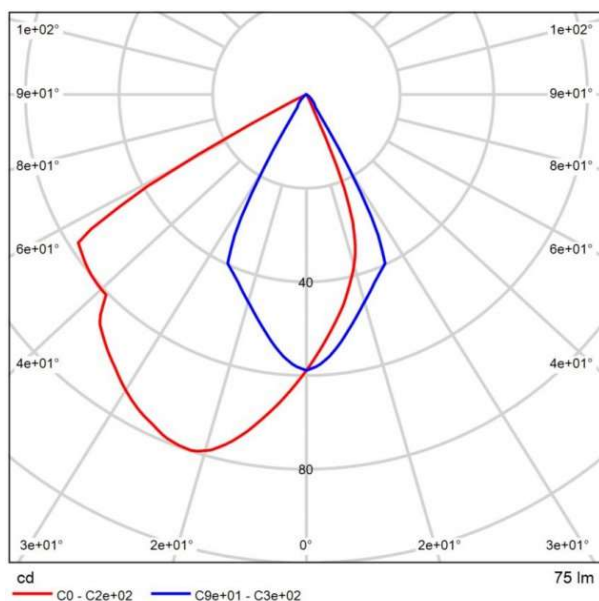

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.