



SLOT

851-s3815w14

MICROSLLOT SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, transparent glass beam 31°, light output direct / indirect, tilting 15°, with converter, dimmability: not dimmable, cable black, IP65

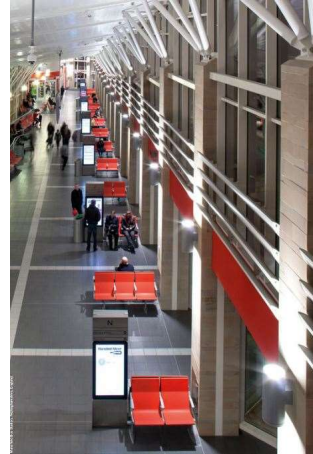


DRAWING



TECHNICAL DETAILS

System perform. [W]	18
Bulb type	LED
Luminous flux [lm]	904
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Beam angle [°]	31°
Voltage [V]	220-240V AC/DC
Material	aluminium
Length [mm]	250
Diameter [mm]	90
Troat [mm]	55
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,87
Colour lamp	grey
Electric wire	black
EAN-Number	8033357138944
Lifetime [h]	50 000 L70 B20
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

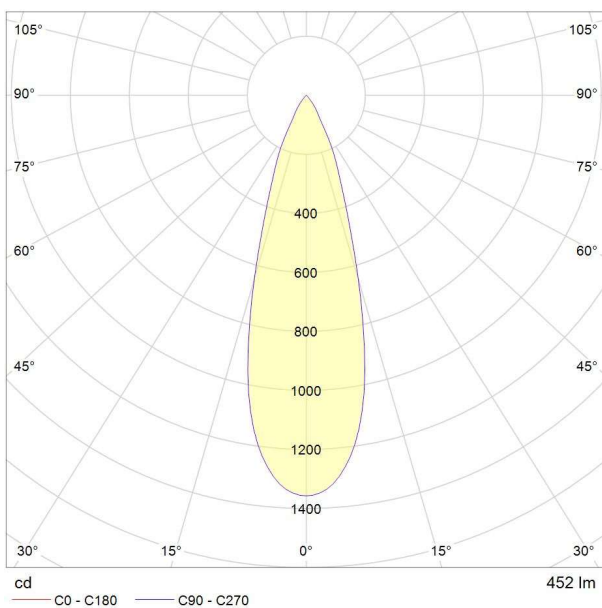

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.