


## COLUMN

851-s4131w14

MINICOLUMN BOLLARD made of aluminium, grey, polycarbonate cover transparent, light output direct, with converter, cable black, IP65




## DRAWING



## TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	394
Colour temp. [K]	3000K
CRI	>90
Optics	polycarbonate cover
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	800
Diameter [mm]	140
IP protection class	IP65
Voltage class	protection cl. II
Shock resistance	IK10
Net weight [kg]	5,00
Colour lamp	grey
Colour of glass/shade	transparent
Electric wire	black
EAN-Number	8033357736041
Lifetime [h]	50 000 L70 B20

## LIGHT DISTRIBUTION CURVE

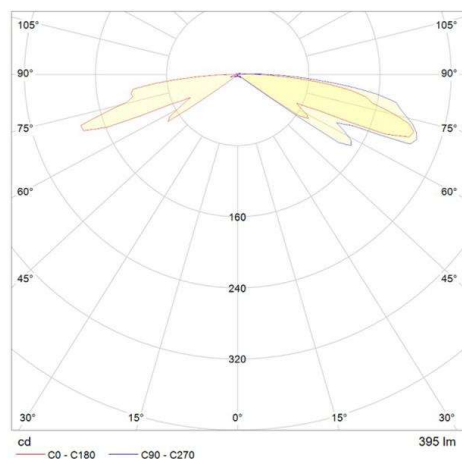

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.