


EOS

851-s4610w14

MINIEOS SQUARE LED RECESSED WALL LUMINAIRE made of aluminium, grey, transparent glass satined, light output direct, with converter, dimmability: not dimmable, IP55 with devorative grid




DRAWING

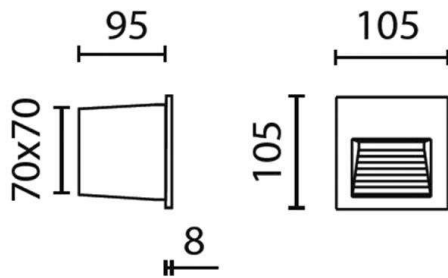

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	39
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	105
Width [mm]	105
Height [mm]	103
Troat [mm]	8
Ceiling cutout [mm]	70x70
Recess depth [mm]	95
IP protection class	IP55
Voltage class	protection cl. I
Shock resistance	IK05
Net weight [kg]	0,62
Colour lamp	grey
Colour of glass/shade	satined
EAN-Number	8033357811342
Lifetime [h]	70 000 L80 B10
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

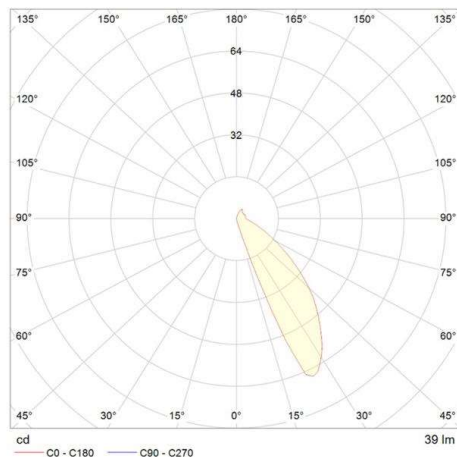

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.