


STEP

851-s4655w14

STEP RECESSED WALL LUMINAIRE made of aluminium, grey, transparent glass transparent, beam 15°, light output indirect, with converter, IP65




DRAWING



TECHNICAL DETAILS

System perform. [W]	3
Bulb type	LED
Luminous flux [lm]	16
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Light output	indirect
Beam angle [°]	15°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	208
Width [mm]	54
Height [mm]	67
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	0,55
Colour lamp	grey
Colour of glass/shade	transparent
EAN-Number	8033357789085
Lifetime [h]	50 000 L70 B20

LIGHT DISTRIBUTION CURVE

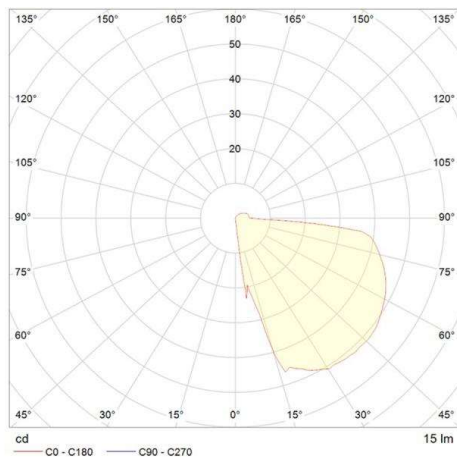

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.