


LIFT

851-s5037w14

MINILIFT LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, transparent glass transparent, beam 3°+43°, light output direct / indirect, with converter, dimmability: not dimmable, IP65




DRAWING

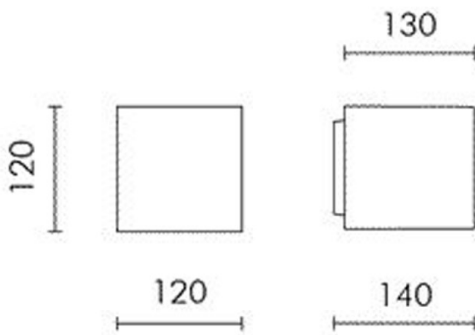

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	58
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Beam angle [°]	3°+43°
Voltage [V]	220-240V AC/DC
Material	aluminium
Length [mm]	120
Width [mm]	120
Height [mm]	140
Troat [mm]	10
IP protection class	IP65
Voltage class	protection cl. II
Shock resistance	IK06
Net weight [kg]	1,64
Colour lamp	grey
Colour of glass/shade	transparent
EAN-Number	8033357461714
Lifetime [h]	50 000 L70 B20
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

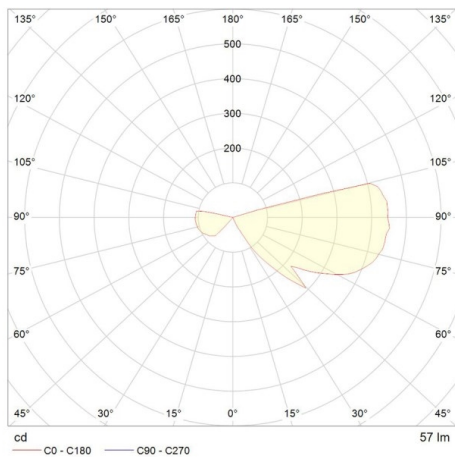

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.