


ZIP

851-s5515w19

MICROZIP ROUND LED RECESSED DOWNLIGHT made of aluminium, stainless steel, transparent glass partially satined, beam 38°, light output direct, tilting 30°, with converter, dimmability: not dimmable, cable black, IP65




DRAWING



TECHNICAL DETAILS

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	172
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	38°
Voltage [V]	220-240V AC/DC
Material	aluminium
Diameter [mm]	85
Ceiling cutout [mm]	75
Ceiling thickness [mm]	10-28
Recess depth [mm]	105
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK09
Net weight [kg]	0,87
Colour lamp	stainless steel
Colour of glass/shade	partially satined
Electric wire	black
EAN-Number	8033357108640
Lifetime [h]	50 000 L70 B20

LIGHT DISTRIBUTION CURVE

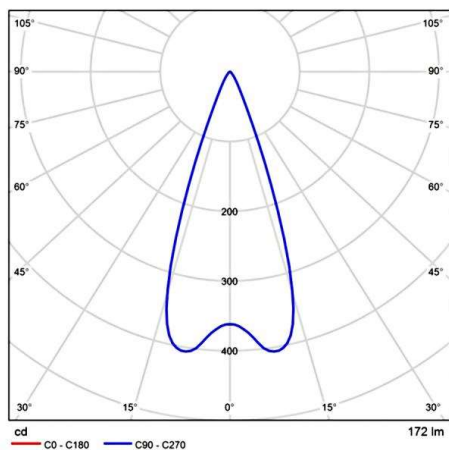

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.