


LOFT

851-s6665w01

MINILOFT SPOT FLOODLIGHTS made of aluminium, white, transparent glass transparent, beam 9°, light output direct, tilting 180°, with converter, dimmability: not dimmable, IP65




DRAWING

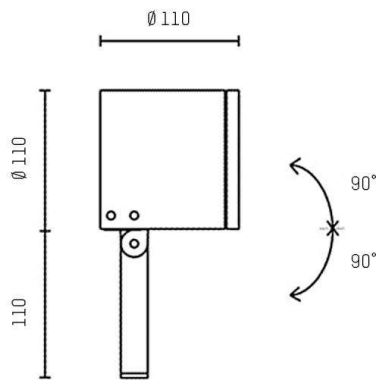

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	354
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	9°
Voltage [V]	220-240V AC/DC
Material	aluminium
Length [mm]	110
Width [mm]	110
Height [mm]	207
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	1,36
Colour lamp	white
Colour of glass/shade	transparent
EAN-Number	8033357759286
Lifetime [h]	50 000 L70 B20
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

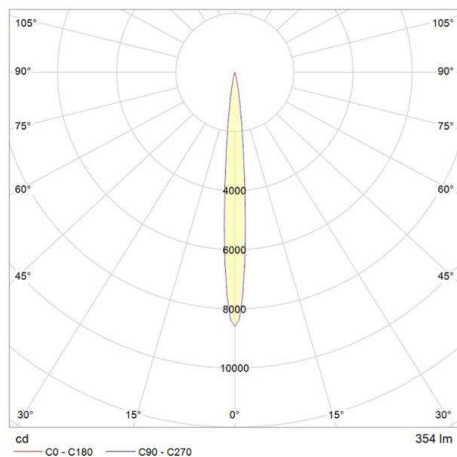

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.