











# 3ONE TIGO



ENGLISH

MOLTO LUCE®

## CONTENT

							
<b>3ONE VISION</b>	<b>3ONE</b>	<b>3ONE BASIC</b>	<b>SENSORS</b>	<b>3ONE OUTDOOR</b>	<b>SPECIAL SOLUTIONS</b>	<b>TIGO</b>	<b>ACCESSORIES</b>
04	06	08	12	14	16-17	18	20



In our industrial catalogs at [moltoluce.com](http://moltoluce.com), you will find numerous ideas and applications from our portfolio.

## RESISTANCE TO CHEMICALS

The following table provides information on the chemical resistance of the different housing materials.

CHEMICALS	PMMA	PC	GRP	INORGANIC ACIDS	PMMA	PC	GRP
Alcohol	✓	✓	✓	Battery acid	✓	✓	✓
Alcohol up to 30%	✗	✗	✗	Bromic acid	✗	✗	✗
Methanol	✗	✗	✗	Hydrochloric acid up to 20%	✓	✓	✓
Glycerin	✓	●	✓	Hydrochloric acid over 20%	✓	●	✓
Glycol	✓	✓	✓	Nitric acid up to 10%	✓	✓	✓
<b>AQUEOUS SOLUTIONS</b>				Nitric acid between 10% and 20%	●	●	●
Seawater	✓	✓	✓	Nitric acid over 20%	✗	✗	✗
Hydrogen peroxide up to 40%	✗	●	✗	Hydrogen sulfide acid	✓	✓	✓
Hydrogen peroxide over 40%	✗	●	✗	Hydrogen sulfide acid up to 50%	✓	✓	✓
Metal salts and their aqueous solutions	✓	✓	✓	Hydrogen sulfide acid up to 70%	●	●	✓
Salt solutions	✓	✓	✓	Hydrogen sulfide acid over 70%	✗	✗	✗
<b>GASES</b>				Hydrogen sulfide acid up to 5%	●	✗	●
Carbon dioxide	✓	✓	✓	<b>ORGANIC ACIDS</b>			
Carbon monoxide	✓	✓	✓	Acetic acid up to 5%	●	✓	✓
<b>HYDROCARBONS</b>				Acetic acid up to 30%	✗	●	✓
Benzene	✗	✗	✗	Butyric acid	✗	●	✓
Diesel oil	✓	●	✓	Citric acid	●	✓	✓
Petroleum ether	✓	✓	✓	Lactic acid	●	✓	✓
Aliphatic hydrocarbons	●	✓	●	<b>BASIC COMPOUNDS</b>			
Aromatic hydrocarbons	✗	✗	●	Ammonia 0,005%*	✓	✗	✓
<b>OILS</b>				Milk of lime	✓	●	✓
Aniline	✗	✗	✗	Synthetic basic compounds	✓	●	✓
Machine tool oils	✗	✗	✓	Sodium hydroxide up to 2%	✓	✗	●
Diesel oil	✗	✗	✓	Sodium hydroxide up to 10%	✓	✗	✗
Brake oil	✗	✗	✗	<b>SOLVENTS</b>			
Flammable acidic oils	✗	●	✓	Acetone	✗	✗	✗
Camphor oil	✗	✗	✗	Ketone	✗	✗	✗
Lubricating oil	●	✓	✓	Chlorophenol	✗	✗	✗
Silicone oil	✓	✓	✓	Chloroform	✗	✗	✗
Paraffin oil	●	✓	✓	Methylene chloride	✗	✗	✗
Saturated mineral oil	✗	✗	●	Dioxane	✗	✗	✓
				Ether	✗	✗	●
				Ethyl acetate	✗	✗	✗
				Phenol	✗	✗	✗
				Methyl ethyl ketone	✗	✗	✗
				Turpentine	●	●	✓
				Pyridine	●	✗	✗
				Carbon tetrachloride	✗	✗	✓
				Xylene	✗	✗	✗

## LEGEND



Resistant



Limited resistance



Not resistant





8

## 3ONE VISION




Version  
Multi-lumen

## ADVANTAGES

- Transparent housing made of PC (polycarbonate), impact-resistant IK08
- With indirect component for ceiling illumination
- High efficiency up to 160 lm/W

### 3ONE VISION PC COVER

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 37W*	5100*	142	4000	1282 x 101 x 84	ON/OFF ML	WITHOUT	175-0942051231401
SYS 48W-15W	6800-2200	142	4000	1282 x 101 x 84	ON/OFF ML	3x 1,5mm	175-0942168231401
SYS 41W*	6500*	147	4000	1578 x 101 x 84	ON/OFF ML	WITHOUT	175-0945065231401
SYS 60W-16W	8800-2500	147	4000	1578 x 101 x 84	ON/OFF ML	3x 1,5mm	175-0945188231401
*Multilumen presetting							
SYS 30W	4700	157	4000	1282 x 101 x 84	DALI	WITHOUT	175-094204523140d
SYS 30W	4700	157	4000	1282 x 101 x 84	DALI	5x 1,5mm	175-094234523140d
SYS 44W	6700	152	4000	1578 x 101 x 84	DALI	WITHOUT	175-094506723140d
SYS 44W	6700	152	4000	1578 x 101 x 84	DALI	5x 1,5mm	175-094536723140d

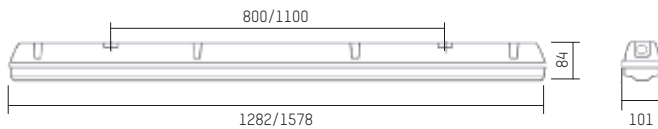

## MOUNTING OPTIONS



ceiling/wall bracket  
(included in delivery)



Hooks for suspension  
(included in delivery)



Luminaire fasteners for TRAIL rail  
610-0031000000000 (to be ordered separately)



# 3ONE



Version  
Multi-lumen

## ADVANTAGES


- Housing made of GRP (glass-reinforced polyester) with silicone seal (silicon-based endless foam)
- High-efficiency LED modules up to 170 lm/W
- Low maintenance with a long lifetime of up to 100,000h L80 B10

### 3ONE PMMA COVER


CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 18/23/27/32W	3100/3900/4500/5300	up to 172	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1162053131441
SYS 24/30/36/43W	4200/5200/5900/7300	up to 175	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1165073131441
SYS 41W	6500	159	4000	1577 x 90 x 95	DALI	WITHOUT	175-016506513144d

### 3ONE PC COVER

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 18/23/27/32W	2900/3700/4300/5100	up to 161	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1162051231441
SYS 24/30/36/43W	4000/5000/5900/7000	up to 167	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1165070231441

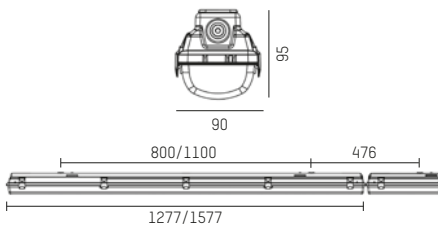

## MOUNTING OPTIONS



For mounting on TRAIL rail  
(included in delivery)



ceiling bracket  
(included in delivery)



Hooks for suspension  
175-013  
(to be ordered separately)



Wall mounting set  
175-014  
(to be ordered separately)





## 3ONE BASIC



Version  
Multi-lumen

## ADVANTAGES

- Housing made of GRP (glass-reinforced polyester) with PU sealing (non-aging polyurethane foam)
- Unique translucency (up to 93%) – excellent visual comfort
- Easy & quick installation with many different feeding options (with 5-pole terminal block)

### 3ONE BASIC PMMA COVER-MULTILUMEN

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 25/30/36/43W	3200/3800/4300/5000	up to 152	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1032050131441
SYS 24/31/37/44W	3700/4700/5500/6300	up to 154	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1035063131441
SYS 30/37/44/51W	4500/5500/6400/7000	up to 150	3000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-0035070131341

### 3ONE BASIC PC COVER-MULTILUMEN


CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 25/30/36/43W	3100/3600/4100/4800	up to 148	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1032048231441
SYS 24/31/37/44W	3500/4500/5300/6000	up to 146	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1035060231441

### 3ONE BASIC PC FIXED OUTPUT


CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 25W	3000	120	4000	669 x 90 x 95	ON/OFF	WITHOUT	175-0031032131440
SYS 38W	4900	129	4000	1277 x 90 x 95	ON/OFF	5x 1,5mm	175-0032349231440
SYS 30W	4000	133	4000	1577 x 90 x 95	ON/OFF	5x 1,5mm	175-0035340231440
SYS 50W	6600	132	4000	1577 x 90 x 95	ON/OFF	5x 1,5mm	175-0035366231440
SYS 51W	6600	129	4000	1577 x 90 x 95	DALI	5x 1,5mm	175-003536623144d

### 3ONE BASIC PC UGR<22

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 29W	4000	138	4000	1577 x 116 x 95	ON/OFF AC/DC	3x 1,5mm	175-1135140231449

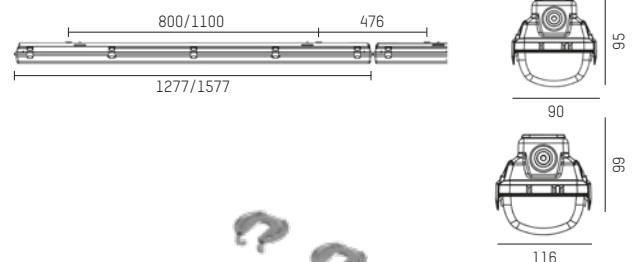

## MOUNTING OPTIONS



For mounting on TRAIL rail  
(included in delivery)



ceiling bracket  
(included in delivery)



Hooks for suspension  
175-013  
(to be ordered separately)



Wall mounting set  
175-014  
(to be ordered separately)

SENSOR APPLICATION

DESCRIPTION

ADVANTAGES

3ONE VISION  
BT MESH



3ONE MASTER

- With integrated high-frequency motion sensor for mounting height of 2.5-3.5m
- With integrated light sensor up to 1000lx
- Optimal mounting height of 2.8m with a detection range of Ø 8m (50m²)
- Bluetooth Mesh communication with a range up to 15m
- Includes DALI bus power supply



- Up to 60% additional energy savings
- Lower investment with full functionality without central control and DALI wiring
- Freely definable delay-times and light levels
- Free, independent lighting group settings for each area
- Options for various time schedules
- Quick commissioning and operation using a free app

3ONE  
BT MESH



3ONE EXTENSION

- With integrated module for Bluetooth Mesh wireless networking
- Range up to 35m
- Includes DALI bus power supply
- With DALI-2 wired communication, up to 16 DALI LED drivers can be connected



- For expanding the Bluetooth Mesh network connection
- Wireless networking with master luminaire
- System settings are automatically adopted from the master
- Commissioning and operation via a free app

3ONE BASIC  
HF SENSOR  
ON/OFF




- With integrated high-frequency motion sensor for optimal mounting height of 2.5-3.5m and range of Ø 8m (50m²)
- Daylight threshold 2 Lux / 10 Lux / 50 Lux / Off
- Switching capacity max. 400W
- Fixed predefined time delays: 5s / 90s / 5min / 15min
- Sensitivity adjustment: 10% / 50% / 75% / 100%






- Up to 60% additional energy savings
- For simple applications with switchable luminaires
- Predefined settings (daylight threshold, timeouts, and sensitivity)
- Easy adjustment using DIP switch

WIRING & COMMUNICATION

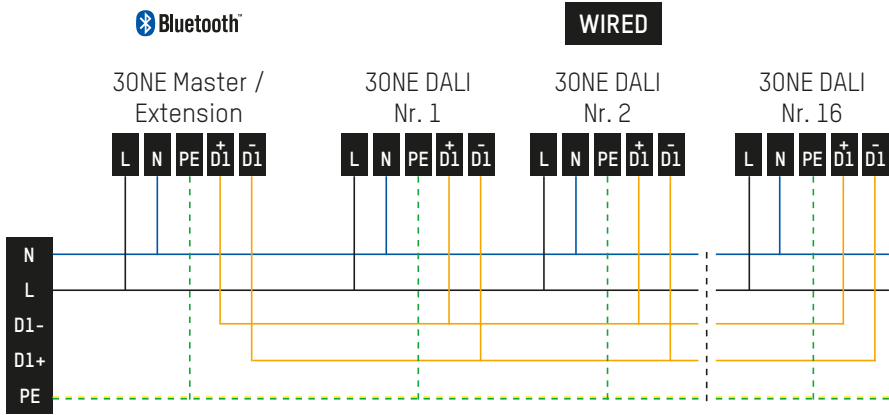


30NE Master (with HF sensor) is wired to other 30NE DALI luminaires with 2x 1.5m<sup>2</sup>.

WIRELESS

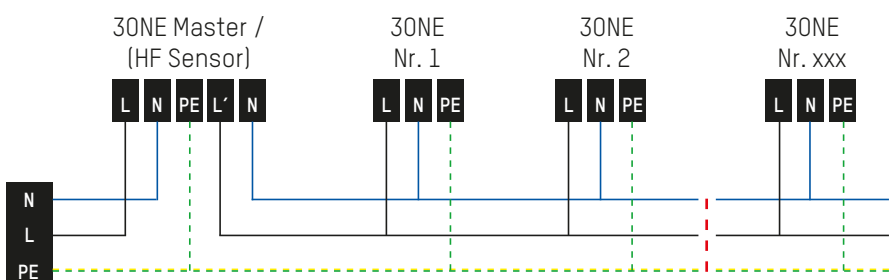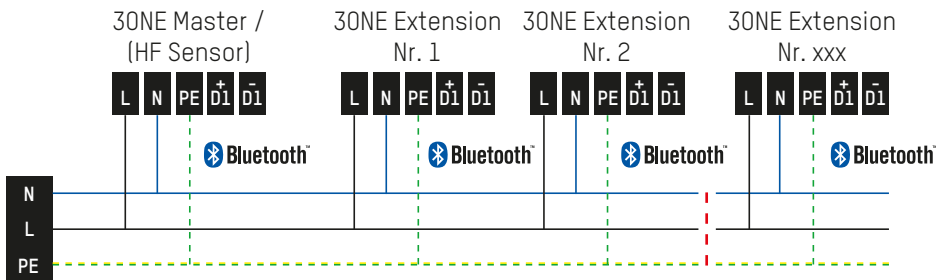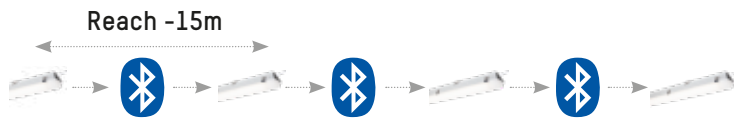

SETTINGS

Very easy operation via free app

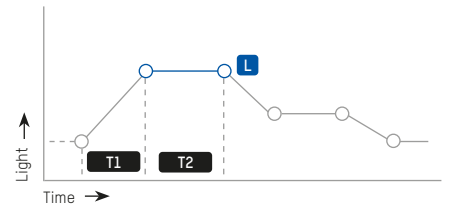

Freely definable occupied, prolonged and vacant timeouts

Overrun ?


Crossfade 3 Sek. ▾

Brightness 52 %

Time out 10 Sek. ▾

0 50 100

Freely definable light levels and time-out settings (1s – 4hrs)

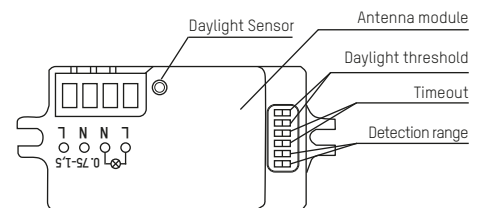

• DIP switch settings for daylight threshold, timeouts, and sensitivity

## SENSORS

### Why sensors are essential in lighting control

Sensors are not only a key element for energy efficiency, enabling additional energy savings of up to 60%, but they also enhance comfort, safety, and the overall user experience.

- Integrated daylight/motion sensors
- Full functionality without central control and DALI wiring
- Easy adjustment and operation with minimal investment



#### 3ONE VISION PC COVER

VERSION	W	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
Bluetooth Mesh with HF-Sensor*	44	6700	152	4000	1577 x 104 x 84	DALI	WITHOUT	175-094506723140h
Bluetooth Mesh with Extension*	44	6700	152	4000	1577 x 104 x 84	DALI	WITHOUT	175-094506723140b



#### 3ONE PMMA COVER

VERSION	W	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
Bluetooth Mesh with HF-Sensor*	41	6500	159	4000	1577 x 90 x 95	DALI	WITHOUT	175-116506513144h
Bluetooth Mesh with Extension*	41	6500	159	4000	1577 x 90 x 95	DALI	WITHOUT	175-116506513144b

#### 3ONE BASIC PMMA COVER


VERSION	W	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
HF-Sensor	30	4300	143	4000	1277 x 90 x 95	ON/OFF AC/DC	3x 1,5mm	175-103214013144k
Sensor	44	6000	136	3000	1577 x 90 x 95	ON/OFF AC/DC	3x 1,5mm	175-103516013134k
Sensor	44	6300	143	4000	1577 x 90 x 95	ON/OFF AC/DC	3x 1,5mm	175-103516013144k



### HIGH-FREQUENCY SENSORS



- Operate with reflective echo
- Circular detection
- Independent of temperature
- Radial-tangential

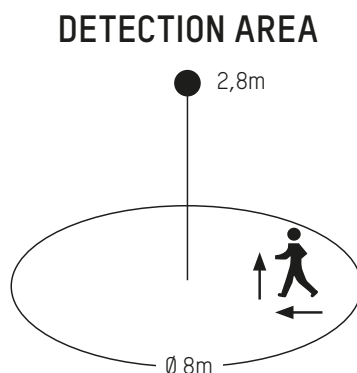



**MADE IN AUSTRIA**

# CARWASH

**PROGRAMM-ÜBERSICHT**

- FOHNSCHÜSS**  
Ansprüche des Schüsser zur  
Schwemmung
- REINIGUNG**  
Reinigungs- und Poliermittel,  
wird Wasser und Öl-Entzug
- SPRÜHSTRAHLE**  
Schnee- und Schmutzabstreifen  
mit kaltem Wasser möglich
- WACHSUNG**  
Reinigungs- und Lackschutz nach  
Anwendung des Reibmittels-Reinigungs
- REINIGUNG**  
Für Reibmittel-Reinigung  
des Motors

**SO WASCHEN SIE RICHTIG**

- Anfahren Sie das System  
mit dem ersten Schüsser
- Nachfahren oder Schmutzabstreifen  
erleichtern
- Geschwächter Programmstart  
erhöhen Programmzeit  
Schrittweise möglich
- Für ein optimales Wachsgebühren,  
alle Programmzeitpunkte  
beachten

**ACHTUNG!**

Abgeben Sie die  
für die sichere Nutzung  
von 20 Jahren

- Leistung mit 20  
Jahren möglich, wenn auf  
die richtige Weise  
benutzt wird
- Nach der Installation, wenn  
möglich, ein Reibmittel-Prüfung
- Reibmittel-Prüfung für Reibmittel-Prüfung  
des Motors
- Nach der Reibmittel-Prüfung  
des Motors
- Nach der Reibmittel-Prüfung  
des Motors
- Nach der Reibmittel-Prüfung  
des Motors

**KTM**

WashTec

KTM

# MOLTO LUCE



PROJECT  
MOLTO LUCE, WEISSKIRCHEN, AUSTRIA

## 3ONE OUTDOOR



Design  
Multi-lumen




## ADVANTAGES

- PMMA diffuser (UV-stable & no yellowing)
- Housing made of GRP (glass-reinforced polyester) with silicone seal (silicon-based endless foam)
- Vented cable gland to prevent moisture buildup inside the luminaire
- High-quality stainless steel clips


### 3ONE OUTDOOR PMMA COVER

PERFORMANCE	LUMEN	LUMEN/W	KELVIN	L x W x H	DESIGN	WIRING	CODE
SYS 21/25/29/35W	3200/3800/4300/5000	bis zu 152	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1632050131441
SYS 24/31/37/44W	3700/4700/5500/6300	bis zu 154	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1635063131441

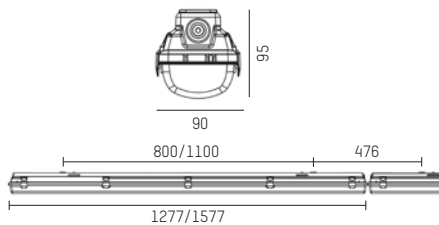

The ventilation screw is included in the delivery.

## MONTAGEMÖGLICHKEITEN

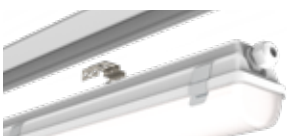

For mounting on TRAIL rail  
(included in delivery)



Ceiling  
175-012  
(to be ordered separately)



Hooks for suspension  
175-013  
(to be ordered separately)



Wall mounting set  
175-014  
(to be ordered separately)

## 3ONE OUTDOOR



Version  
Multi-lumen




## ADVANTAGES

- PMMA diffuser (UV-stable & no yellowing)
- Housing made of GRP (glass-reinforced polyester) with silicone seal (silicon-based endless foam)
- Ventilation cable gland to prevent moisture buildup inside the luminaire
- High-quality stainless steel clips


### 3ONE OUTDOOR PMMA COVER

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 21/25/29/35W	3200/3800/4300/5000	up to 152	4000	1277 x 90 x 95	ON/OFF ML	WITHOUT	175-1632050131441
SYS 24/31/37/44W	3700/4700/5500/6300	up to 154	4000	1577 x 90 x 95	ON/OFF ML	WITHOUT	175-1635063131441

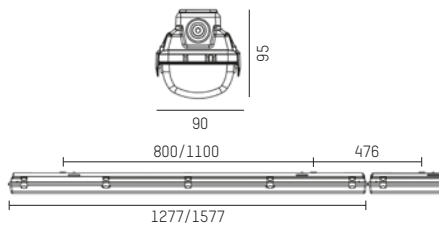

The venting cable gland is included in the delivery.

## MOUNTING OPTIONS



For mounting on TRAIL rail  
(included in delivery)



ceiling bracket  
(included in delivery)



Hooks for suspension  
175-013  
(to be ordered separately)



Wall mounting set  
175-014  
(to be ordered separately)



# Special solutions for demanding areas



## 3ONE SKII

Damp proof luminaire, housing made of GRP (glass-reinforced polyester)  
With silicone seal (silicon-based endless foam), including converter, CRI>80

### Typical applications

Simple and fire-hazardous workplaces, areas with increased security standards, high levels of contamination



## 3ONE EMERGENCY

Damp proof luminaire, housing made of GRP (glass-reinforced polyester)  
With silicone seal (silicon-based endless foam), including converter, CRI>80

### Typical applications

Emergency lighting solution with single battery system, for simple and fire-hazardous workplaces, and areas with high levels of contamination (e.g., parking garages)



## 3ONE H&L

Damp proof luminaire, housing made of GRP (glass-reinforced polyester)  
With silicone seal (silicon-based endless foam), including converter, CRI>80

### Typical applications

Extreme temperatures (both high and low), high humidity & moisture (e.g., cold storage)



## 3ONE EXTREME

Damp proof luminaire, housing made of GRP (glass-reinforced polyester), including converter, CRI>80

### Typical applications

Special industrial areas with increased requirements for chemical resistance, livestock farming (not suitable for poultry farming), storage areas


Every industrial facility and application has unique requirements. That's why we offer customized lighting solutions that are perfectly tailored to your specific needs. Whether it's fire-hazardous workplaces, areas with high security requirements, or zones that must withstand extreme temperatures and special chemical resistance demands, we have the right and safe product.

## ADVANTAGES

Protection class II, unique translucency (up to 93%) – excellent visual comfort, no wiring, 4000K



Single battery (nominal operating duration: 3h), 420lm in emergency operation  
Housing made of GRP (glass-reinforced polyester), PC cover with high impact resistance IK08  
Unique translucency (up to 93%) – excellent visual comfort  
High-quality stainless steel clips

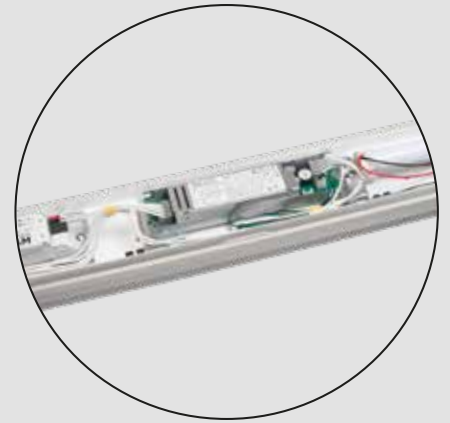

High temperature resistance (-30° C to +55° C) with full lifetime, vented cable gland to prevent moisture buildup inside the luminaire, complies with international food standards, no through-wiring, 4000K.



Higher chemical resistance, ammonia-resistant, specially protected electronic ballasts (EVGs) & light engine, 4000K.





# TIG0



Version  
Multi-lumen



## ADVANTAGES

- Robust PC (Polycarbonate) housing (IP66) with high impact resistance IK08
- Easy & quick installation with many different application possibilities
- Flexibility with MULTI-LUMEN ballast

### TIG0 PC COVER

CONNECTED LOAD	LUMINOUS FLUX (lm)	LUMEN/W	KELVIN	L x W x H	ECG	THROUGH-WIRING	CODE
SYS 19/24/30/ <b>35</b>	2700/3400/4250/ <b>4950</b>	142	3000	1195 x 65 x 60	ON/OFF ML	3x 1,5mm	<b>175-1762150231341</b>
SYS 19/24/30/ <b>35</b>	2900/3650/4550/ <b>5300</b>	152	4000	1195 x 63 x 60	ON/OFF ML	3x 1,5mm	<b>175-1762150231441</b>
SYS 30/38/ <b>44</b> /50	4300/5400/ <b>6250</b> /7100	142	3000	1495 x 65 x 60	ON/OFF ML	3x 1,5mm	<b>175-1765165231341</b>
SYS 30/38/ <b>44</b> /50	4550/5750/ <b>6700</b> /7600	152	4000	1495 x 65 x 60	ON/OFF ML	3x 1,5mm	<b>175-1765165231441</b>

Values marked in bold = Multilumen default setting

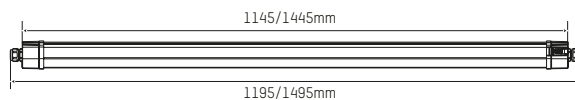

## MOUNTING OPTIONS



ceiling bracket  
(included in delivery)



suspension  
175-177  
(to be ordered separately)

## EMPTY RAIL



### TRUNKING RAIL

empty module without through-wiring



galvanized sheet steel

Suitable for luminaire mounting standard clamps

**610-0205000000XX0** L: 4510mm




2pcs. standard clamps  
included in delivery

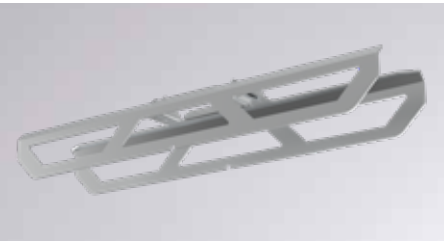


### LINEAR CONNECTOR MECHANIC

inside

**610-0023000000000**



## COVERS

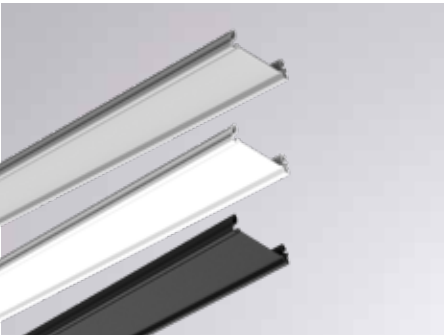

### BLIND COVER

plastic

**610-0231000000XX0**

L: 1137mm

**610-0237000000XX0**



L: 1696mm

**610-0232000000XX0**

L: 2255mm

**610-0233000000XX0**

L: 4510mm







### BLIND COVER

metal

**610-0234000000050**

**w**


L: 1137mm

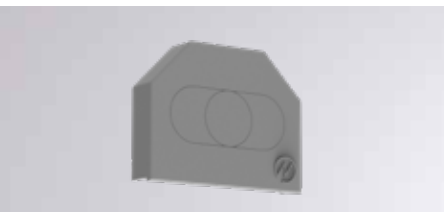

### END CAP

set 2 pcs.

**610-0001000000XX0**



## COMPLETE CODE

**XX** = COLOUR

**s** silver = **04**

**w** white = **05**

**s** black = **06**



# MOUNTING COMPONENTS



## CEILING MOUNTING SET

no tools needed

610-0003000000000

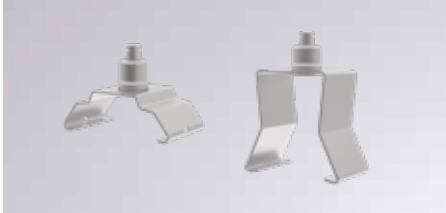


## ROPE FAST SUSPENSION

no tools needed

610-0004000000000 LOW

610-0005000000000 HIGH for 25mm installation conduit




## STEEL ROPE WITH LOOP

no tools needed, to be shortened as desired

610-0025000000000 Ø 1,5mm / L 1500mm

610-0026000000000 Ø 1,5mm / L 3000mm

610-0027000000000 Ø 1,5mm / L 6000mm




## CHAIN SUSPENSION

no tools needed

610-0006000000000 LOW


610-0019000000000 HIGH for 25mm installation conduit



## CHAIN

Load capacity: max. 30kg

835-9926194 Ø 2,2mm / per meter




## CABLE HOLDER

no tools needed

610-0014000000000 INSIDE

610-0016000000000 OUTSIDE



## CABLE HOLDER INSIDE

metal

610-0029000000000



## VENTILATION CABLE GLAND (30NE)

175-043



## SEALING GROMMET (30NE)

175-017

## AUSTRIA

### HEADOFFICE WELS

**Office & Showroom**  
Europastraße 45  
4600 Wels, Austria  
+43 7242 698-0  
office@moltoluce.com

### PRODUCTION WEISSKIRCHEN

**Office**  
Gewerbepark 6 + 10  
4616 Weißkirchen, Austria  
+43 7243 60063  
office.weisskirchen@moltoluce.com

## VIENNA

**Office & Showroom**  
Vorarlberger Allee 28  
1230 Vienna, Austria  
+43 1 6160300  
office.wien@moltoluce.com

## GRAZ

**Office**  
Robert-Viertl-Straße 2  
8055 Graz, Austria  
+43 316 672525-0  
office.graz@moltoluce.com

## INNSBRUCK

**Office**  
Orbis Office, Resselstraße 33  
6020 Innsbruck, Austria  
+43 512 345688  
office.innsbruck@moltoluce.com

## GERMANY

### MUNICH

**Office & Showroom**  
Walter-Gropius-Straße 23  
80807 Munich, Germany  
+49 89 4520565-0  
office.muenchen@moltoluce.com

### COLOGNE

**Office & Showroom**  
Schanzenstraße 39 D14  
51063 Cologne, Germany  
+49 221 222882-0  
office.koeln@moltoluce.com

### HAMBURG

**Office & Showroom**  
Wandsbeker Allee 77  
22041 Hamburg, Germany  
+49 40 2847850-1  
office.hamburg@moltoluce.com

## SWITZERLAND

### LENZBURG

**Office**  
Niederlenzerstrasse 25  
5600 Lenzburg, Switzerland  
+41 62 885 70 30  
office.lenzburg@moltoluce.com

## ITALY

### BRESCIA

**Office**  
Viale Duca D'Aosta 28  
25135 Brescia, Italy  
+39 030 2400679  
office.brescia@moltoluce.com

## EXPORT

### INTERNATIONAL SALES

Peter Sadlon  
Head of International Sales  
+43 676 6980990  
molto\_export@moltoluce.com



MOLTOLUCE.COM