


WINDOW

305-6801p

WINDOW I RECESSED SPOTLIGHT made of aluminium, natural anodised, light output direct, without converter, max. 250mA, IP20



DRAWING

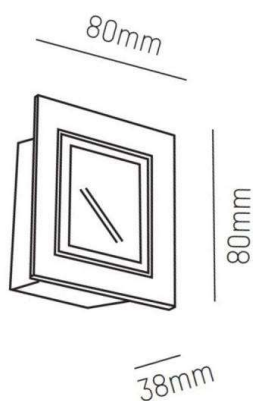


TECHNICAL DETAILS

Bulb type	LED 3W
Luminous flux [lm]	234
Current sec. [mA]	250
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Light output	direct
Voltage [V]	15 VDC
Material	aluminium

Length [mm]	80
Width [mm]	80
Height [mm]	38
Ceiling cutout [mm]	69x69
Recess depth [mm]	68
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,12

Color lamp	natural anodised
EAN-Number	9008905807091
Lifetime [h]	25 000

LIGHT DISTRIBUTION CURVE

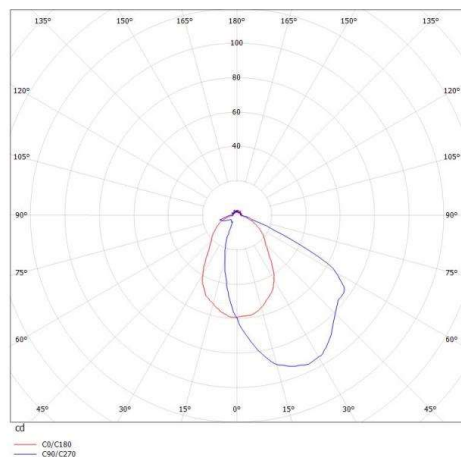

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.