


COZY

573-0100914006060

COZY DOWNLIGHT R RECESSED DOWNLIGHT made of aluminium, black, similar to RAL 9005, decor black, vacuum deposited synthetic Dark-reflector beam 38°, light output direct, UGR <22, without converter, dimmability: not dimmable, IP20




DRAWING

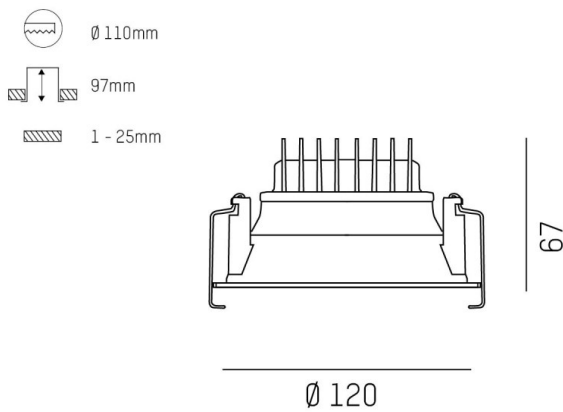

TECHNICAL DETAILS

| | |
|------------------------|---|
| Bulb type | LED 15W |
| Luminous flux [lm] | 560 |
| Colour temp. [K] | 4000K |
| CRI | >90 |
| UGR | <22 |
| Optics | vacuum deposited synthetic Dark-reflector |
| Designer | Serge Cornelissen |
| Converter | without converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 38° |
| Voltage [V] | 24 VDC |
| Material | aluminium |
| Height [mm] | 67 |
| Diameter [mm] | 120 |
| Ceiling cutout [mm] | 110 |
| Ceiling thickness [mm] | 1-25 |
| Recess depth [mm] | 97 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK06 |
| Net weight [kg] | 0,39 |
| Colour lamp | black |
| RAL | 9005 |
| Colour decor | black |
| EAN-Number | 9010506960341 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |

LIGHT DISTRIBUTION CURVE

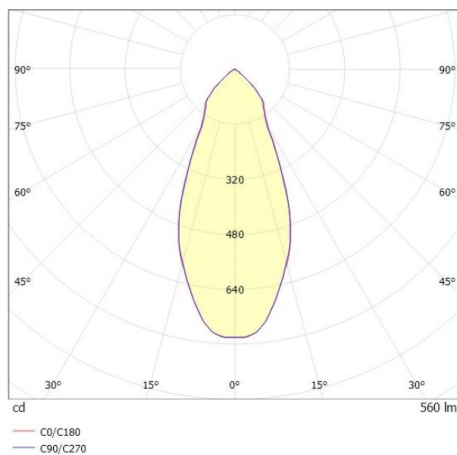

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.