


TRIGGA

662-003020523480

TRIGGA LONG VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, bronze, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, with converter, max. 350mA, dimmability: not dimmable, cable black, fabric, adapter/ceiling base grey, pendant length 1500mm, IP20




DRAWING

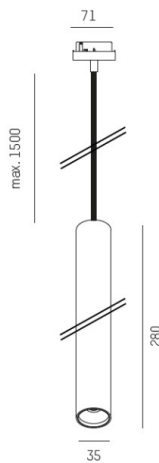

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	270
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Optics	LFO lens
Designer	Serge Cornelissen
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	35
Height [mm]	280
Pendant length [mm]	1500
Diameter [mm]	35
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,92
Colour lamp	bronze
Colour adapter/ceiling base	grey
Electric wire	black, fabric
EAN-Number	9010506717105
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	G
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

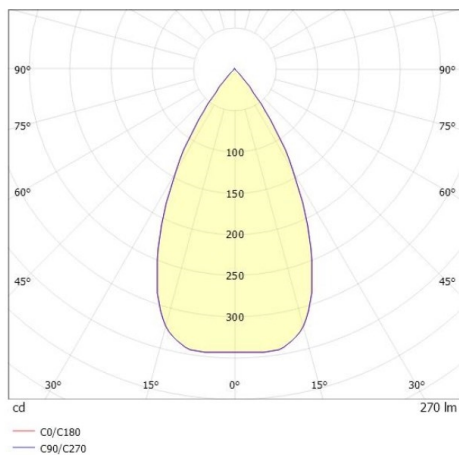

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.