


SUNRAY

8-09519455

SUNRAY I R RECESSED SPOTLIGHT made of aluminium, white matt, similar to RAL 9003, beam 36°, light output direct, without converter, max. 250/350mA, IP44/IP20




DRAWING

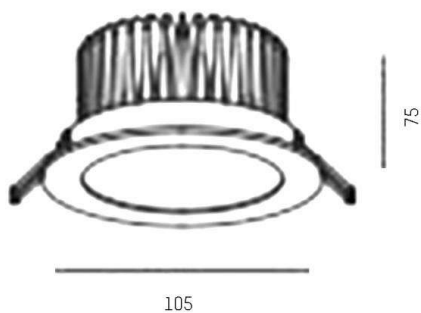

TECHNICAL DETAILS

Bulb type	LED 10W/14W
Luminous flux (lm)	1000/1400
Current sec. [mA]	250/350
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Light output	direct
Beam angle [°]	36°
Material	aluminium
Height [mm]	75
Diameter [mm]	105
Ceiling cutout [mm]	95
Ceiling thickness [mm]	max. 20mm
Recess depth [mm]	105
IP protection class	IP44/IP20
Voltage class	protection cl. III
Net weight [kg]	0,30
Colour lamp	white matt
RAL	9003
EAN-Number	9010506035933
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

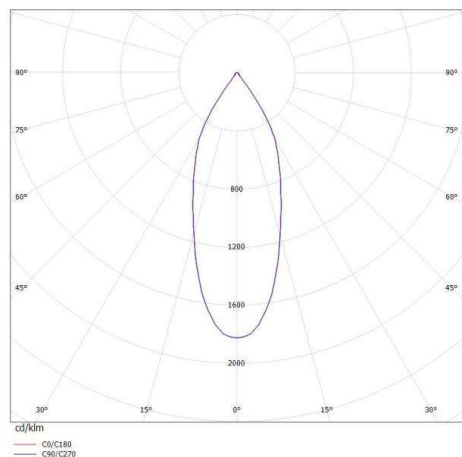

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.