

MINIPLAN HORIZONTAL

851-s3883w14

MINIPLAN D LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, satined glass satined, light output direct, with converter, dimmable not dimmable, cable black, IP65 horizontal




DRAWING



TECHNICAL DETAILS

| | |
|---------------------|-------------------|
| System perform. [W] | 13 |
| Bulb type | LED |
| Luminous flux [lm] | 475 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | satined glass |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 220 |
| Width [mm] | 80 |
| Height [mm] | 38 |
| IP protection class | IP65 |
| Voltage class | protection cl. II |
| Shock resistance | IK06 |
| Net weight [kg] | 0,98 |
| Color lamp | grey |
| Glass color | satined |
| Electric wire | black |
| EAN-Number | 8033357860616 |
| Lifetime [h] | 50 000 L70 B20 |

LIGHT DISTRIBUTION CURVE

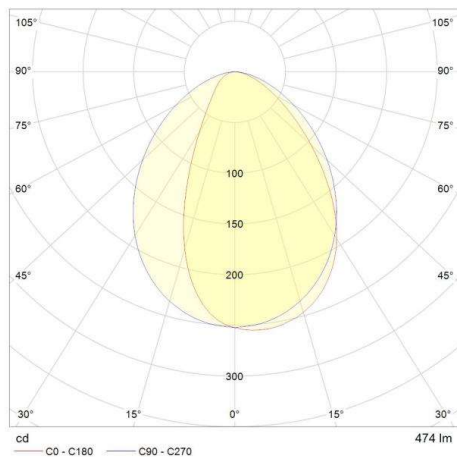

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.